

Westland Construction

Scheduling Department Procedural Outline



Introduction & Overview

This document defines the process for developing, maintaining, and implementing a detailed Project CPM Schedule. The project schedule will undergo several stages of development, complexity, and detail during the preconstruction, construction, and closeout phases of the project. Westland is working to establish a more systematic approach to scheduling. Rather than start from scratch with each new project, we will create detailed accurate baseline template schedules for each standard project and building type. From there, schedules will be carefully adjusted and customized to fit the specific project. This should never be a boiler plate process. The activities, logic, and durations for each schedule must be unique. However, the basic structure, organization, and workflow should be consistent across all Westland projects.

We must be disciplined in our approach to scheduling. This will require consistent effort up front to ensure we have truly digested the documents and understand the project. We must consult with the people who will actually do the work and ensure we have accurate sequencing, good durations, realistic time frames for shop drawings, review, fabrication, and shipping. It is typically necessary to do some guess work to complete an initial schedule. However, teams must resist the temptation to then assume the schedule is accurate. It may be a great outline, but without real input from trade partners, suppliers, design teams, owners, etc. the schedule will not be a true reflection of how the work will progress. Westland will also work to implement additional tools to facilitate schedule health and risk analyses enabling each project team to create an accurate, achievable, and measurable roadmap to project success.

Please utilize the following outline as a reference at each stage of the scheduling process.

This document will also eventually outline how to utilize the project schedule to properly develop and populate the Supply Chain Log and its interface with the Domo Dashboard system.

Schedule Development

- Business Development / Directors request a proposal schedule from Scheduling Department
 - This request should be submitted to the Scheduling Department Manager as early as possible, but no less than 14 days before the schedule is needed.
- Develop Conceptual Project Schedule with Project Proposal
 - Utilize a Westland template, or ensure organization and formatting adhere to Westland's standards. (See attached guidelines for organization, WBS elements, and formatting.)
 - Obtain a detailed design & permitting schedule from the design team. Guide the design team to include sufficient information to accurately track progress.
 - Include the design process in Westland's conceptual schedule.
 - Coordinate with estimating / preconstruction to provide appropriate detail and durations for preconstruction deliverables, prequalification, buyout, etc.
 - Include a procurement section for key materials, and identify any materials needing early release, expedited reviews, or careful monitoring due to market issues. Include all long lead items and materials identified as critical or likely to experience delays during the submittal or fabrication process. Include fabrication and shipping activities and secure valid durations.
 - Develop a clear Site Logistics & Workflow Plan prior to creating the detailed schedule. (See included example.)
 - Provide a detailed construction schedule with typical activities and durations for the proposed building.

Westland Construction

Scheduling Department Procedural Outline



- Ensure the level of detail corresponds to the amount of design information available.
 - Consult with team members
 - Reference similar projects and construction types
 - Use reasonable assumptions and historical data to compensate for incomplete design
 - Include Westland standard responsibility codes and assign each task a responsible party
- Consistently update activities & logic at each phase of project.
 - Design – As required by design progress and preconstruction agreement.
 - Preconstruction – As required by the preconstruction agreement
 - Construction - Weekly
 - Closeout – Produce a final record schedule documenting the completion of all contract work, closeout items, and applicable owner occupancy activities.
- Fully develop **Detailed** Baseline Construction schedule using the following methods and steps:
 - Meet with the project director and PMT to develop a graphic schedule detailing the anticipated scope, identifying general areas, zoning, phasing, and flow for all site development and structures included in the project. The Superintendent must be an integral part of this process.
 - The project scheduler then creates the tasks and logic in the CPM software and issues a draft for PMT review.
 - PMT provides an in-depth review and feedback on the draft schedule.
 - PMT and project scheduler then work with trade partners and suppliers to perform any needed pull planning to confirm scope, establish durations, and secure buy-in. A digital process is acceptable, provided key team members are directly involved in the process or are performing concurrent reviews and providing active feedback.
 - Run reports utilizing the SmartPM Quality Checker and the P6 Check Schedule Report to ensure all schedule activities have sound logic, optimal sequencing, and appropriate predecessor and successor relationships. **This step is critical prior to establishing the baseline version of the schedule.**
- Establish Baseline Schedule and submit for approval to Owner. The Baseline Schedule will be finalized and set once the Notice to Proceed is issued by the Owner. Typically this is required within 10 days of contract execution.
- In Primavera P6 Professional, once accepted, assign the approved version as the Baseline Schedule and export an XER file as a record prior to commencing any updates. In Phoenix Project Manager, save a separate copy of the schedule as the Baseline Version and establish the primary Storepoint before commencing any updates.
- Create a new project in SmartPM and upload the baseline schedule to commence schedule performance tracking and provide access to schedule analytics. In the rare case of a project being too short to warrant creating a project in SmartPM, the Quality Checker must be utilized to ensure the schedule is in compliance with best practices and standards.



Schedule Maintenance & Updates

- Ongoing schedule maintenance and updates are required at all stages of the project. Fewer updates will be required during preconstruction, but design progress must be accurately tracked.
- Utilize the preconstruction period to carefully review logic, sequencing, durations, relationships, etc. and make necessary adjustments and corrections.
- Update Accepted Preconstruction Proposal Schedule
 - Preconstruction Schedule Updates:
 - Schematic Design
 - Design Development
 - 70% Construction Documents
 - 100% Construction Documents and/or;
 - As needed / required during Design
 - Preconstruction Schedule Deliverables:
 - Updated Design Schedule
 - Extract required Rolling Schedules directly from the updated Baseline Schedule during Preconstruction Services. This schedule will be attached to the Preconstruction Reports submitted to the Owner as required by the preconstruction agreement.
 - Any required filters
 - Trades
 - Critical Path
 - Specific Section of Schedule, etc.
 - Construction
 - The Scheduling Manager and Lead Scheduler will determine who will perform schedule updates and maintenance during construction. As we train more Project Engineers and Superintendents we will be able to delegate these functions more frequently. But, the Scheduling Department will maintain oversight and assist with any changes to logic, sequencing, durations, etc. until the project is complete.
 - Schedules shall be updated Weekly, or Bi-Monthly if warranted, but no less than every other week.
 - The full Westland project team should participate in these updates. Updates may also be performed with the trades during the weekly coordination meeting. This is ideal, but may not be feasible on international projects.
 - Before commencing an update, create a new dated schedule update folder on the shared drive, or wherever the project team maintains project files. Preserve a record of the current version of the schedule. To do this in Phoenix, prior to commencing the update, simply create a copy of the last updated file, and rename it to the current date. The previous update will remain unchanged and is the record file. To maintain a record version in P6, once the update is complete export an XER file while the project schedule is still open. Place this record version of the schedule in the same folder you created for the current update and PDF reports.
 - At all stages of the project clearly document changes made to the schedule including altering relationships, adding activities, deleting activities, splitting activities, etc. **This is done automatically when a project update is uploaded to SmartPM.**

Westland Construction

Scheduling Department Procedural Outline



- Store a copy of the current updated schedule in the appropriate schedule folder on the G:Drive, Procore, or other project file location. Store another copy of the current schedule update on the hard drive of your machine. This will allow you to access the schedule and perform any required updates if Westland is experiencing network, or server failures.
- Issue a Weekly Update Report via email and copy the full PMT, Project Director, Estimator, and the Scheduling Team. Include all elements outlined in the Schedule Update Email Procedure guidelines.
- Construction Schedule Deliverables at each update:
 - Updated Baseline Schedule
 - Critical Path Schedule
 - Longest Path Schedule
 - 4-Week Rolling Schedule
 - Extracted from the updated Baseline Schedule. This schedule will be used to Assist the Superintendents in developing their more detailed 4-Week schedules and for coordination with the trade contractors.
 - Any required or beneficial filters
 - Trades – Responsible Parties
 - Procurement
 - Other Specific Sections of Schedule, etc.
 - Any reports or filters required by the project specifications
 - Upload the current update through Procore Drive to enable the use of the Procore scheduling tool.
 - Assist PMTs with the creation and maintenance of graphic schedules

Managing & Documenting Schedule Impacts

- Any issue impacting, or potentially impacting, the project schedule must be properly documented.
- The scheduler should insert impact activities that tie into the existing schedule logic to clearly demonstrate the affect the issue is having on the completion of current and subsequent activities, as well as any impact to project completion.
- Anticipated delays should be published and presented to the owner's representative and project team as soon as Westland's team is aware of an impact, or potential impact. Clear, honest, timely communication is vital to secure approval of any claims for time and added compensation.
- Time Impact Analysis (TIA)
 - Prior to submitting a claim any delays on the project should be entered as IMPACT Activities into the schedule to communicate the delay. If it is determined the IMPACT activities are driving the Critical Path, a TIA must be developed. This is done by creating a Fragnet (fragment of the schedule logic network) within the updated baseline schedule tied to the activity the IMPACT is driving, and creating an appropriate successor relationship with the next activity to show the effect on the Critical Path. Once the schedule is updated and the fragnet prepared, use the standardized Impact Analysis Form to develop the TIA.
- If at all possible, EOTs, should be submitted in the form of a PCO on a monthly basis. Clearly indicate verbally and in writing when a delay is ongoing so the owner will know we will continue to submit future claims until the core issue is fully resolved.

Westland Construction

Scheduling Department Procedural Outline



- If a delay is our fault (caused by a trade contractor) we must do all in our power to create a solid recovery plan and avoid the delay. Rather than respond to trade delays or other issues by simply surrendering float, or giving up critical path days and extending the schedule, we need to work as a team to secure buy in and then hold our partners accountable to meet the recovery dates.

Schedule Organization

- Adhere as closely as possible to the following Work Breakdown Structure (WBS) sections and general organization of the schedule. Also refer to the included sample collapsed schedule demonstrating how this WBS should be applied to a real project.

GENERAL SCHEDULE ORGANIZATION

PROJECT

- SUMMARY & MILESTONES
 - CONTRACT MILESTONES & SUMMARY BARS
 - KEY PERFORMANCE MILESTONES

PRE-CONSTRUCTION

- DESIGN
- ESTIMATES - CONSTRUCTABILITY REPORTS - SCHEDULE UPDATES
- BIM MODELING
- TRADE PRE-QUALIFICATION
- BUY OUT - PROPOSAL & AWARD
- OWNER PERMIT / CONSENT PROCESS

PROCUREMENT

- SUBMITTALS - APPROVALS - FABRICATION - DELIVERY

CONSTRUCTION

- SITWORK
 - INITIAL SITWORK
 - CLEAR & GRUB - CUT & FILL - ROUGH GRADE - UTILITIES
 - BALANCE OF SITWORK
 - HARDSCAPE - LANDSCAPE - EQUIPMENT ENCLOSURES
- STRUCTURE & SUBROUGH
 - AREA - LEVEL
- BUILDING ENCLOSURE - WINDOWS - ENTRIES - FINISH SYSTEMS
 - ELEVATION - AREA - LEVEL
- INTERIOR ROUGH-IN & FINISHES
 - AREA - LEVEL

COMMISSIONING & CLOSE-OUT - (MAY BE SHOWN BY BUILDING, AREA, OR FLOOR)

Westland Construction

Scheduling Department Procedural Outline



- Schedules shall contain the following elements as a minimum standard:
 - Milestones – One Milestone every 30 Days (Critical Path or Significant Event)
 - Include Westland standard required milestones and any others required by the project specifications.
 - Prequalification Process/Mock-Ups
 - Design (if CM/GC or Design Build)
 - Schematic Design
 - Design Development
 - 70% Construction Documents
 - 100% Construction Documents
 - Submittals/Procurement/Mock-Ups
 - Preconstruction Activities
 - Construction
 - Sitework
 - Structure & Sub-Rough
 - Building Enclosure
 - Interior Rough-In & Finishes
 - Closeout
 - Progress Impacts
 - Weather Days
 - PR's/ASI's
 - Owner Delays
 - Contractor Delays

Schedule Formatting

- Follow the established Westland branding and color guidelines. Reference the approved color key and sample layouts included herein. If additional customizing is required for a specific client, consult the Scheduling Department Manager for approval of new color schemes and branding.

Westland Construction

Scheduling Department Procedural Outline



Introduction & Overview

This document defines the process for developing, maintaining, and implementing a detailed Project CPM Schedule. The project schedule will undergo several stages of development, complexity, and detail during the preconstruction, construction, and closeout phases of the project. Westland is working to establish a more systematic approach to scheduling. Rather than start from scratch with each new project, we will create detailed accurate baseline template schedules for each standard project and building type. From there, schedules will be carefully adjusted and customized to fit the specific project. This should never be a boiler plate process. The activities, logic, and durations for each schedule must be unique. However, the basic structure, organization, and workflow should be consistent across all Westland projects.

We must be disciplined in our approach to scheduling. This will require consistent effort up front to ensure we have truly digested the documents and understand the project. We must consult with the people who will actually do the work and ensure we have accurate sequencing, good durations, realistic time frames for shop drawings, review, fabrication, and shipping. It is typically necessary to do some guess work to complete an initial schedule. However, teams must resist the temptation to then assume the schedule is accurate. It may be a great outline, but without real input from trade partners, suppliers, design teams, owners, etc. the schedule will not be a true reflection of how the work will progress. Westland will also work to implement additional tools to facilitate schedule health and risk analyses enabling each project team to create an accurate, achievable, and measurable roadmap to project success.

Please utilize the following outline as a reference at each stage of the scheduling process.

This document will also eventually outline how to utilize the project schedule to properly develop and populate the Supply Chain Log and its interface with the Domo Dashboard system.

Schedule Development

- Business Development / Directors request a proposal schedule from Scheduling Department
 - This request should be submitted to the Scheduling Department Manager as early as possible, but no less than 14 days before the schedule is needed.
- Develop Conceptual Project Schedule with Project Proposal
 - Utilize a Westland template, or ensure organization and formatting adhere to Westland's standards. (See attached guidelines for organization, WBS elements, and formatting.)
 - Obtain a detailed design & permitting schedule from the design team. Guide the design team to include sufficient information to accurately track progress.
 - Include the design process in Westland's conceptual schedule.
 - Coordinate with estimating / preconstruction to provide appropriate detail and durations for preconstruction deliverables, prequalification, buyout, etc.
 - Include a procurement section for key materials, and identify any materials needing early release, expedited reviews, or careful monitoring due to market issues. Include all long lead items and materials identified as critical or likely to experience delays during the submittal or fabrication process. Include fabrication and shipping activities and secure valid durations.
 - Develop a clear Site Logistics & Workflow Plan prior to creating the detailed schedule. (See included example.)
 - Provide a detailed construction schedule with typical activities and durations for the proposed building.

Westland Construction

Scheduling Department Procedural Outline



- Ensure the level of detail corresponds to the amount of design information available.
 - Consult with team members
 - Reference similar projects and construction types
 - Use reasonable assumptions and historical data to compensate for incomplete design
 - Include Westland standard responsibility codes and assign each task a responsible party
- Consistently update activities & logic at each phase of project.
 - Design – As required by design progress and preconstruction agreement.
 - Preconstruction – As required by the preconstruction agreement
 - Construction - Weekly
 - Closeout – Produce a final record schedule documenting the completion of all contract work, closeout items, and applicable owner occupancy activities.
- Fully develop **Detailed** Baseline Construction schedule using the following methods and steps:
 - Meet with the project director and PMT to develop a graphic schedule detailing the anticipated scope, identifying general areas, zoning, phasing, and flow for all site development and structures included in the project. The Superintendent must be an integral part of this process.
 - The project scheduler then creates the tasks and logic in the CPM software and issues a draft for PMT review.
 - PMT provides an in-depth review and feedback on the draft schedule.
 - PMT and project scheduler then work with trade partners and suppliers to perform any needed pull planning to confirm scope, establish durations, and secure buy-in. A digital process is acceptable, provided key team members are directly involved in the process or are performing concurrent reviews and providing active feedback.
 - Run reports utilizing the SmartPM Quality Checker and the P6 Check Schedule Report to ensure all schedule activities have sound logic, optimal sequencing, and appropriate predecessor and successor relationships. **This step is critical prior to establishing the baseline version of the schedule.**
- Establish Baseline Schedule and submit for approval to Owner. The Baseline Schedule will be finalized and set once the Notice to Proceed is issued by the Owner. Typically this is required within 10 days of contract execution.
- In Primavera P6 Professional, once accepted, assign the approved version as the Baseline Schedule and export an XER file as a record prior to commencing any updates. In Phoenix Project Manager, save a separate copy of the schedule as the Baseline Version and establish the primary Storepoint before commencing any updates.
- Create a new project in SmartPM and upload the baseline schedule to commence schedule performance tracking and provide access to schedule analytics. In the rare case of a project being too short to warrant creating a project in SmartPM, the Quality Checker must be utilized to ensure the schedule is in compliance with best practices and standards.

Schedule Maintenance & Updates

- Ongoing schedule maintenance and updates are required at all stages of the project. Fewer updates will be required during preconstruction, but design progress must be accurately tracked.
- Utilize the preconstruction period to carefully review logic, sequencing, durations, relationships, etc. and make necessary adjustments and corrections.
- Update Accepted Preconstruction Proposal Schedule

Westland Construction

Scheduling Department Procedural Outline



- Preconstruction Schedule Updates:
 - Schematic Design
 - Design Development
 - 70% Construction Documents
 - 100% Construction Documents and/or;
 - As needed / required during Design
- Preconstruction Schedule Deliverables:
 - Updated Design Schedule
 - Extract required Rolling Schedules directly from the updated Baseline Schedule during Preconstruction Services. This schedule will be attached to the Preconstruction Reports submitted to the Owner as required by the preconstruction agreement.
 - Any required filters
 - Trades
 - Critical Path
 - Specific Section of Schedule, etc.
- Construction
 - The Scheduling Manager and Lead Scheduler will determine who will perform schedule updates and maintenance during construction. As we train more Project Engineers and Superintendents we will be able to delegate these functions more frequently. But, the Scheduling Department will maintain oversight and assist with any changes to logic, sequencing, durations, etc. until the project is complete.
 - Schedules shall be updated Weekly, or Bi-Monthly if warranted, but no less than every other week.
 - The full Westland project team should participate in these updates. Updates may also be performed with the trades during the weekly coordination meeting. This is ideal, but may not be feasible on international projects.
 - Before commencing an update, create a new dated schedule update folder on the shared drive, or wherever the project team maintains project files. Preserve a record of the current version of the schedule. To do this in Phoenix, prior to commencing the update, simply create a copy of the last updated file, and rename it to the current date. The previous update will remain unchanged and is the record file. To maintain a record version in P6, once the update is complete export an XER file while the project schedule is still open. Place this record version of the schedule in the same folder you created for the current update and PDF reports.
 - At all stages of the project clearly document changes made to the schedule including altering relationships, adding activities, deleting activities, splitting activities, etc. **This is done automatically when a project update is uploaded to SmartPM.**
 - Store a copy of the current updated schedule in the appropriate schedule folder on the G:Drive, Procore, or other project file location. Store another copy of the current schedule update on the hard drive of your machine. This will allow you to access the schedule and perform any required updates if Westland is experiencing network, or server failures.
 - Issue a Weekly Update Report via email and copy the full PMT, Project Director, Estimator, and the Scheduling Team. Include all elements outlined in the Schedule Update Email Procedure guidelines.
- Construction Schedule Deliverables at each update:

Westland Construction

Scheduling Department Procedural Outline



- Updated Baseline Schedule
- Critical Path Schedule
- Longest Path Schedule
- 4-Week Rolling Schedule
 - Extracted from the updated Baseline Schedule. This schedule will be used to Assist the Superintendents in developing their more detailed 4-Week schedules and for coordination with the trade contractors.
- Any required or beneficial filters
 - Trades – Responsible Parties
 - Procurement
 - Other Specific Sections of Schedule, etc.
 - Any reports or filters required by the project specifications
- Upload the current update through Procore Drive to enable the use of the Procore scheduling tool.
- Assist PMTs with the creation and maintenance of graphic schedules

Managing & Documenting Schedule Impacts

- Any issue impacting, or potentially impacting, the project schedule must be properly documented.
- The scheduler should insert impact activities that tie into the existing schedule logic to clearly demonstrate the affect the issue is having on the completion of current and subsequent activities, as well as any impact to project completion.
- Anticipated delays should be published and presented to the owner's representative and project team as soon as Westland's team is aware of an impact, or potential impact. Clear, honest, timely communication is vital to secure approval of any claims for time and added compensation.
- Time Impact Analysis (TIA)
 - Prior to submitting a claim any delays on the project should be entered as IMPACT Activities into the schedule to communicate the delay. If it is determined the IMPACT activities are driving the Critical Path, a TIA must be developed. This is done by creating a Fragnet (fragment of the schedule logic network) within the updated baseline schedule tied to the activity the IMPACT is driving, and creating an appropriate successor relationship with the next activity to show the effect on the Critical Path. Once the schedule is updated and the fragnet prepared, use the standardized Impact Analysis Form to develop the TIA.
- If at all possible, EOTs, should be submitted in the form of a PCO on a monthly basis. Clearly indicate verbally and in writing when a delay is ongoing so the owner will know we will continue to submit future claims until the core issue is fully resolved.
- If a delay is our fault (caused by a trade contractor) we must do all in our power to create a solid recovery plan and avoid the delay. Rather than respond to trade delays or other issues by simply surrendering float, or giving up critical path days and extending the schedule, we need to work as a team to secure buy in and then hold our partners accountable to meet the recovery dates.

Schedule Organization

Westland Construction

Scheduling Department Procedural Outline



- Adhere as closely as possible to the following Work Breakdown Structure (WBS) sections and general organization of the schedule. Also refer to the included sample collapsed schedule demonstrating how this WBS should be applied to a real project.

GENERAL SCHEDULE ORGANIZATION

PROJECT

- SUMMARY & MILESTONES
 - CONTRACT MILESTONES & SUMMARY BARS
 - KEY PERFORMANCE MILESTONES

PRE-CONSTRUCTION

- DESIGN
 - ESTIMATES - CONSTRUCTABILITY REPORTS - SCHEDULE UPDATES
 - BIM MODELING
 - TRADE PRE-QUALIFICATION
 - BUY OUT - PROPOSAL & AWARD
 - OWNER PERMIT / CONSENT PROCESS

PROCUREMENT

- SUBMITTALS - APPROVALS - FABRICATION - DELIVERY

CONSTRUCTION

- SITWORK
 - INITIAL SITWORK
 - CLEAR & GRUB - CUT & FILL - ROUGH GRADE - UTILITIES
 - BALANCE OF SITWORK
 - HARDSCAPE - LANDSCAPE - EQUIPMENT ENCLOSURES
- STRUCTURE & SUBROUGH
 - AREA - LEVEL
- BUILDING ENCLOSURE - WINDOWS - ENTRIES - FINISH SYSTEMS
 - ELEVATION - AREA - LEVEL
- INTERIOR ROUGH-IN & FINISHES
 - AREA - LEVEL

COMMISSIONING & CLOSE-OUT - (MAY BE SHOWN BY BUILDING, AREA, OR FLOOR)

- Schedules shall contain the following elements as a minimum standard:
 - Milestones – One Milestone every 30 Days (Critical Path or Significant Event)
 - Include Westland standard required milestones and any others required by the project specifications.
 - Prequalification Process/Mock-Ups
 - Design (if CM/GC or Design Build)
 - Schematic Design
 - Design Development
 - 70% Construction Documents

Westland Construction

Scheduling Department Procedural Outline



- 100% Construction Documents
- Submittals/Procurement/Mock-Ups
- Preconstruction Activities
- Construction
 - Sitework
 - Structure & Sub-Rough
 - Building Enclosure
 - Interior Rough-In & Finishes
- Closeout
- Progress Impacts
 - Weather Days
 - PR's/ASI's
 - Owner Delays
 - Contractor Delays


Schedule Formatting

- Follow the established Westland branding and color guidelines. Reference the approved color key and sample layouts included herein. If additional customizing is required for a specific client, consult the Scheduling Department Manager for approval of new color schemes and branding.

TEMPLE CONSTRUCTION - STRUCTURAL WORK FLOW

NOTE: REFER TO 600 SERIES FOR WINDOW & DOOR TYPE REFERENCES.
DRAWING TO BE READ IN CONJUNCTION WITH BRICKWORK
DIMENSION PLANS - SHEET BA-110 TO BA-115.

LUMBUMBASHI (DRC) KEY PLAN

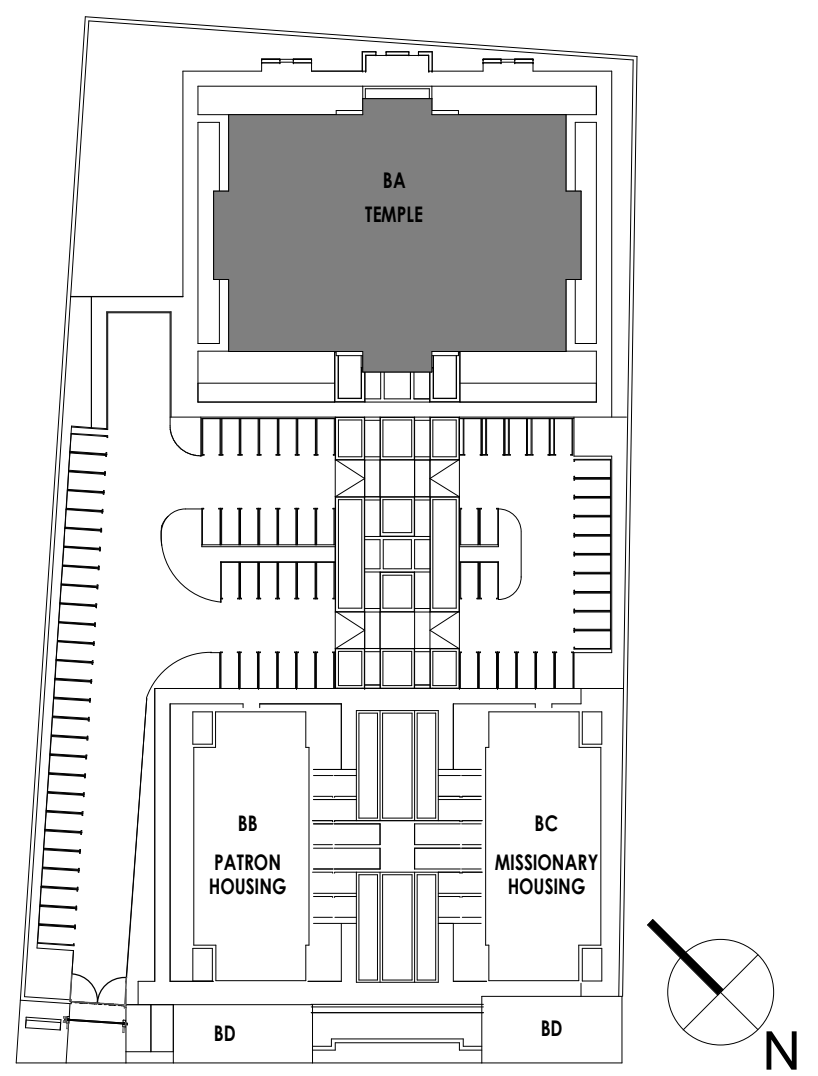

The Church of Jesus Christ
of Latter-day Saints

revisions

rev.	description	date	rev. by
------	-------------	------	---------

GENERAL NOTES

- DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
- ALL LEVELS AND DIMENSIONS TO BE CONFIRMED ON SITE PRIOR TO PUTTING THE RESPECTIVE WORK IN HAND.
- ANY DISCREPANCIES TO BE REPORTED TO THE ARCHITECT FOR CLARIFICATION BEFORE PUTTING THE WORK IN HAND.
- ALL WORK TO BE CARRIED OUT STRICTLY IN ACCORDANCE WITH BUILDING REGULATIONS AND LOCAL AUTHORITY BY-LAWS AND WHERE APPLICABLE TO BE SUBJECT TO A RATIONAL DESIGN BY A REGISTERED COMPANY/PERSON.
- NO PORTION OF PROPOSED WORK TO ENCRoACH OVER THE BOUNDARY AND ADJACENT PROPERTIES.
- ALL STRUCTURAL, CIVIL, MECHANICAL, ELECTRICAL AND WET SERVICES WORK TO BE IN ACCORDANCE WITH PROFESSIONAL ENGINEERS DESIGN, DETAILS AND SPECIFICATIONS.
- ALL PROFESSIONAL ENGINEERS LAYOUTS TO BE READ IN CONJUNCTION WITH ARCHITECTURAL DRAWINGS.
- REFER TO SHEET A-8C-001 FOR SANWARE AND ELECTRICAL MOUNTING HEIGHTS AND FINISHES SCHEDULE FOR SPECIFICATIONS.
- REFER TO SHEET A-8C-102 FOR ALL CEILING LEGENDS, CEILING NOTES, FLOOR LEGENDS AND SPECIFICATION NOTES FOR ALL 400 SERIES DRAWINGS.
- ALL TILING DIMENSIONS ARE TO BE CHECKED PRIOR TO LAYOUT. DRY LAY MAY BE REQUIRED.
- ALL BRICKWORK SETTING OUT POINTS ARE TO BE TAKEN FROM RAW FACE OF BRICKWORK.

HATCH LEGEND

- REINFORCED CONCRETE SHEAR WALL. REFER TO STRUCTURAL ENGINEER'S DRAWINGS.
- CEMENT BLOCKWORK WALL. REFER TO SHEET A-BA-105 - DIMENSION BRICKWORK PLAN.
- CLADDING SUBSTRUCTURE ZONE. REFER TO FACADE ENGINEER'S DRAWINGS.
- 'GIALLO NEBBIA GRANITE' NATURAL STONE CLADDING. REFER TO FACADE ENGINEER'S DRAWINGS.
- TIMBER

ROOM SCHEDULE - GROUND

NUMBER	NAME	AREA
101	Vestibule 1	6 m²
102	Service Stair	5 m²
103	Hotel	5 m²
104	Entry	41 m²
105	Waiting 1	36 m²
106	Baptistry Waiting	17 m²
107	Confirmation	11 m²
108	Baptistry	72 m²
109	Boys - Dressing	14 m²
109a	Boys - Vestibule 1	5 m²
109b	Custodial 1	2 m²
109c	Boys - Shower 1	2 m²
109d	Boys - Restroom 2	2 m²
109e	Boys - Restroom	4 m²
109f	Boys - Vestibule 2	5 m²
110	Girls - Dressing	14 m²
110a	Girls - Vestibule 1	5 m²
110b	Girls - Shower 1	2 m²
110c	Girls - Shower 2	3 m²
110d	Girls - Restroom	4 m²
110e	Girls - Vestibule 2	5 m²
111	Clothing 1	8 m²
112	Laundry	49 m²
113	Font Equipment	9 m²
114	Women - Dressing 2	29 m²
115	Women - Restroom	13 m²
116	Women - Dressing 1	12 m²
117	Women - Booth 2	2 m²
118	Women - Booth 1	2 m²
119	Women - Instruction	9 m²
120	Women - Instruction 2	8 m²
121	Women - Instruction 1	8 m²
122	Hallway 5	22 m²
123	Hallway 4	15 m²
124	Training	17 m²
125	Custodial 2	3 m²
126	Storage 1	2 m²
127	Instruction 1	37 m²
127a	Instruction 1 Vestibule	2 m²

ROOM SCHEDULE - GROUND

NUMBER	NAME	AREA
128	Instruction 2	42 m²
129	Pass Through 1	23 m²
130	Lobby	64 m²
131	Pass Through 2	23 m²
132	Instruction 3	42 m²
133	Instruction 4	37 m²
133a	Instruction 4 Vestibule	2 m²
134	Hallway 7	15 m²
135	Storage 3	3 m²
136	Storage 2	2 m²
137	Hallway 6	22 m²
138	Waiting 2	26 m²
138a	Hallway 3	9 m²
138b	Hallway 2	12 m²
139	Vestibule 2	4 m²
140	Break Room	15 m²
141	Custodial 3	8 m²
142	Restroom 1	4 m²
143	Men - Dressing 2	34 m²
144	Men - Restroom	13 m²
145	Men - Dressing 1	12 m²
146	Men - Booth 2	2 m²
147	Men - Booth 1	2 m²
148	Men - Instruction Waiting	9 m²
149	Men - Instruction 1	8 m²
150	Men - Instruction 2	8 m²
151	Hallway 1	12 m²
152	Waiting 3	21 m²
153	Hallway 8	18 m²
154	Administration	22 m²
155	Work Room	10 m²
156	President's Office	26 m²
157	Audiovisual Rm.	6 m²
158	Matron's Office	21 m²
159	Office	20 m²
160	Restroom 2	5 m²
161	Shoe & Coat Area	9 m²
162	Restroom 3	5 m²
163	Waiting 4	28 m²
164	Clothing 2	21 m²
Grand total: 79		1173 m²

PATON TAYLOR
ARCHITECTS | Est.1887

NOTE: LEVEL 2 STATION BUILDING LUMBAWASHI OFFICE PARK
593 AVENUE KASHABWE
CENTRAL LUMBUMBASHI
DEMOCRATIC REPUBLIC OF CONGO (DRC)

LUMBUMBASHI DRC TEMPLE

Architect : Paton Taylor Architects

Engineer : ARUP

Landscape Architect : Uys & White

Project Type: New Construction

Location: 593 Avenue Kashabwe
Central Lumbumbashi
Democratic Republic of Congo (DRC)

Submittal: CONSTRUCTION

Date: 20 MAY 2022

REFERENCE PLAN - GROUND STOREY

A-BA-101

Drawn By JE/RC/HK

Checked By DLS/LAH/RP

Rev No.

BA - REFERENCE PLAN GROUND STOREY

A1

1

2

3

4

5


6

PLANT DATE: 2022/05/20 10:48:11
FILE PATH: I:\BA-100\REF\Lumbumbashi\REF\BA-101\BA-101.dwg
SHEET SIZE: A0

TEMPLE CONSTRUCTION - INTERIOR WORK FLOW

NOTE: REFER TO 600 SERIES FOR WINDOW & DOOR TYPE REFERENCES.
DRAWING TO BE READ IN CONJUNCTION WITH BRICKWORK
TO BA-115.

LUMBUMBASHI (DRC) KEY PLAN

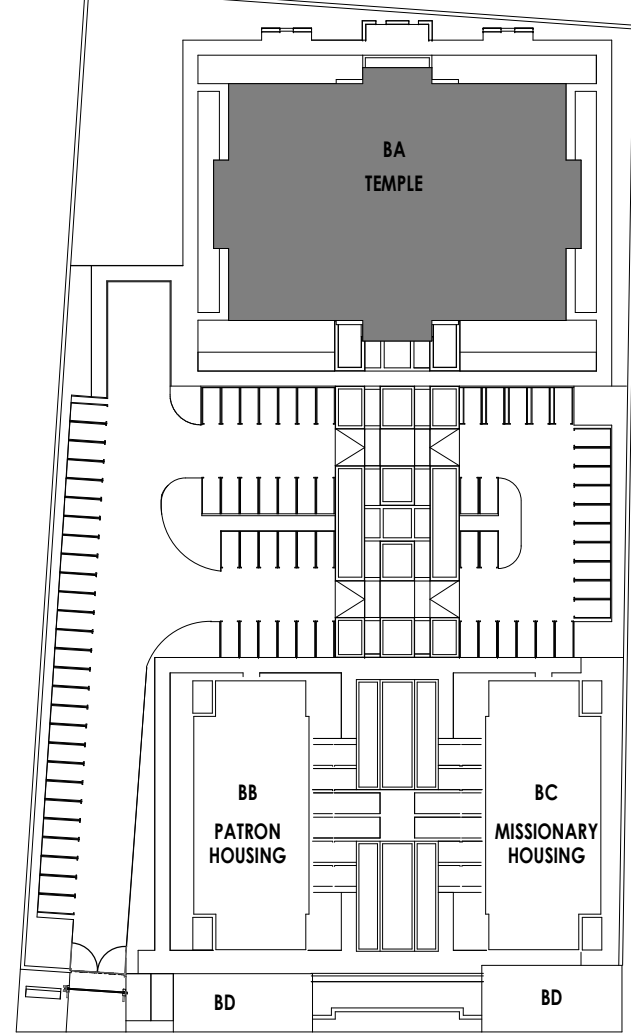

The Church of Jesus Christ
of Latter-day Saints

revisions

rev.	description	date	rev. by
------	-------------	------	---------

GENERAL NOTES

- DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
- ALL LEVELS AND DIMENSIONS TO BE CONFIRMED ON SITE PRIOR TO PUTTING THE RESPECTIVE WORK IN HAND.
- ANY DISCREPANCIES TO BE REPORTED TO THE ARCHITECT FOR CLARIFICATION BEFORE PUTTING THE WORK IN HAND.
- ALL WORK TO BE CARRIED OUT STRICTLY IN ACCORDANCE WITH BUILDING REGULATIONS AND LOCAL AUTHORITY BY-LAWS AND WHERE APPLICABLE TO BE SUBJECT TO A RATIONAL DESIGN BY A REGISTERED COMPANY/PERSON.
- NO PORTION OF PROPOSED WORK TO ENCRoACH OVER THE BOUNDARY AND ADJACENT PROPERTIES.
- ALL STRUCTURAL, CIVIL, MECHANICAL, ELECTRICAL AND WET SERVICES WORK TO BE IN ACCORDANCE WITH PROFESSIONAL ENGINEERS DESIGN, DETAILS AND SPECIFICATIONS.
- ALL PROFESSIONAL ENGINEERS LAYOUTS TO BE READ IN CONJUNCTION WITH ARCHITECTURAL DRAWINGS.
- REFER TO SHEET A-8C-001 FOR SANWARE AND ELECTRICAL MOUNTING HEIGHTS AND FINISHES SCHEDULE FOR SPECIFICATIONS.
- REFER TO SHEET A-8C-102 FOR ALL CEILING LEGENDS, CEILING NOTES, FLOOR LEGENDS AND SPECIFICATION NOTES FOR ALL 400 SERIES DRAWINGS.
- ALL TILING DIMENSIONS ARE TO BE CHECKED PRIOR TO LAYOUT. DRY LAY MAY BE REQUIRED.
- ALL BRICKWORK SETTING OUT POINTS ARE TO BE TAKEN FROM RAW FACE OF BRICKWORK.

HATCH LEGEND

- REINFORCED CONCRETE SHEAR WALL. REFER TO STRUCTURAL ENGINEER'S DRAWINGS.
- CEMENT BLOCKWORK WALL. REFER TO SHEET A-BA-105 - DIMENSION BRICKWORK PLAN.
- CLADDING SUBSTRUCTURE ZONE. REFER TO FACADE ENGINEER'S DRAWINGS.
- 'GIALLO NEBBIA GRANITE' NATURAL STONE CLADDING. REFER TO FACADE ENGINEER'S DRAWINGS.
- TIMBER

ROOM SCHEDULE - GROUND

NUMBER	NAME	AREA
101	Vestibule 1	6 m²
102	Service Stair	5 m²
103	Hotel	5 m²
104	Entry	41 m²
105	Waiting 1	36 m²
106	Baptistry Waiting	17 m²
107	Confirmation	11 m²
108	Baptistry	72 m²
109	Boys - Dressing	14 m²
109a	Boys - Vestibule 1	5 m²
109b	Custodial 1	2 m²
109c	Boys - Shower 1	2 m²
109d	Boys - Shower 2	2 m²
109e	Boys - Restroom	4 m²
109f	Boys - Vestibule 2	5 m²
110	Girls - Dressing	14 m²
110a	Girls - Vestibule 1	5 m²
110b	Girls - Shower 1	2 m²
110c	Girls - Shower 2	3 m²
110d	Girls - Restroom	4 m²
110e	Girls - Vestibule 2	5 m²
111	Clothing 1	8 m²
112	Laundry	49 m²
113	Font Equipment	9 m²
114	Women - Dressing 2	29 m²
115	Women - Restroom	13 m²
116	Women - Dressing 1	12 m²
117	Women - Booth 2	2 m²
118	Women - Booth 1	2 m²
119	Women - Instruction Waiting	9 m²
120	Women - Instruction 2	8 m²
121	Women - Instruction 1	8 m²
122	Hallway 5	22 m²
123	Hallway 4	15 m²
124	Training	17 m²
125	Custodial 2	3 m²
126	Storage 1	2 m²
127	Instruction 1 Vestibule	37 m²
127a	Instruction 1 Vestibule	2 m²

ROOM SCHEDULE - GROUND

NUMBER	NAME	AREA
128	Instruction 2	42 m²
129	Pass Through 1	23 m²
130	Lobby	64 m²
131	Pass Through 2	23 m²
132	Instruction 3	42 m²
133	Instruction 4	37 m²
133a	Instruction 4 Vestibule	2 m²
134	Hallway 7	15 m²
135	Storage 3	3 m²
136	Storage 2	2 m²
137	Hallway 6	22 m²
138	Waiting 2	26 m²
138a	Hallway 3	9 m²
138b	Hallway 2	12 m²
139	Vestibule 2	4 m²
140	Break Room	15 m²
141	Custodial 3	8 m²
142	Restroom 1	4 m²
143	Men - Dressing 2	34 m²
144	Men - Restroom	13 m²
145	Men - Dressing 1	12 m²
146	Men - Booth 2	2 m²
147	Men - Booth 1	2 m²
148	Men - Instruction Waiting	9 m²
149	Men - Instruction 1	8 m²
150	Men - Instruction 2	8 m²
151	Hallway 1	12 m²
152	Waiting 3	21 m²
153	Hallway 8	18 m²
154	Administration	22 m²
155	Work Room	10 m²
156	President's Office	26 m²
157	Audiovisual Rm.	6 m²
158	Matron's Office	21 m²
159	Office	20 m²
160	Restroom 2	5 m²
161	Shoe & Coat Area	9 m²
162	Restroom 3	5 m²
163	Waiting 4	28 m²
164	Clothing 2	21 m²
Grand total: 79		1173 m²

PATON TAYLOR
ARCHITECTS | Est.1887

BA-115 LEVEL 2 STATION BUILDING LUMBA-115 OFFICE PLAN
PROJECT: LUMBA-115 OFFICE PLAN
P: +255(0)21331077 www.paton-taylor.co.za

LUMBUMBASHI DRC TEMPLE

Architect: Paton Taylor Architects

Engineer: ARUP

Landscape Architect: Uys & White

Project Type: New Construction

Location: 593 Avenue Kashobwe
Central Lubumbashi
Democratic Republic
of Congo (DRC)

Submittal: CONSTRUCTION

Date: 20 MAY 2022

REFERENCE PLAN - GROUND STOREY

A-BA-101

Drawn By JE/RC/HK

Checked By DLS/LAH/RP



Rev No.

PLOT DATE: 2022/05/20 10:48:11
FILE PATH: BA-115 DRC Lumbumbashi DRC LUMBA-115 OFFICE PLAN
SHEET SIZE: A0

BA - REFERENCE PLAN GROUND STOREY

A1
1:75

TEMPLE SITE CONSTRUCTION - SITE WORK FLOW

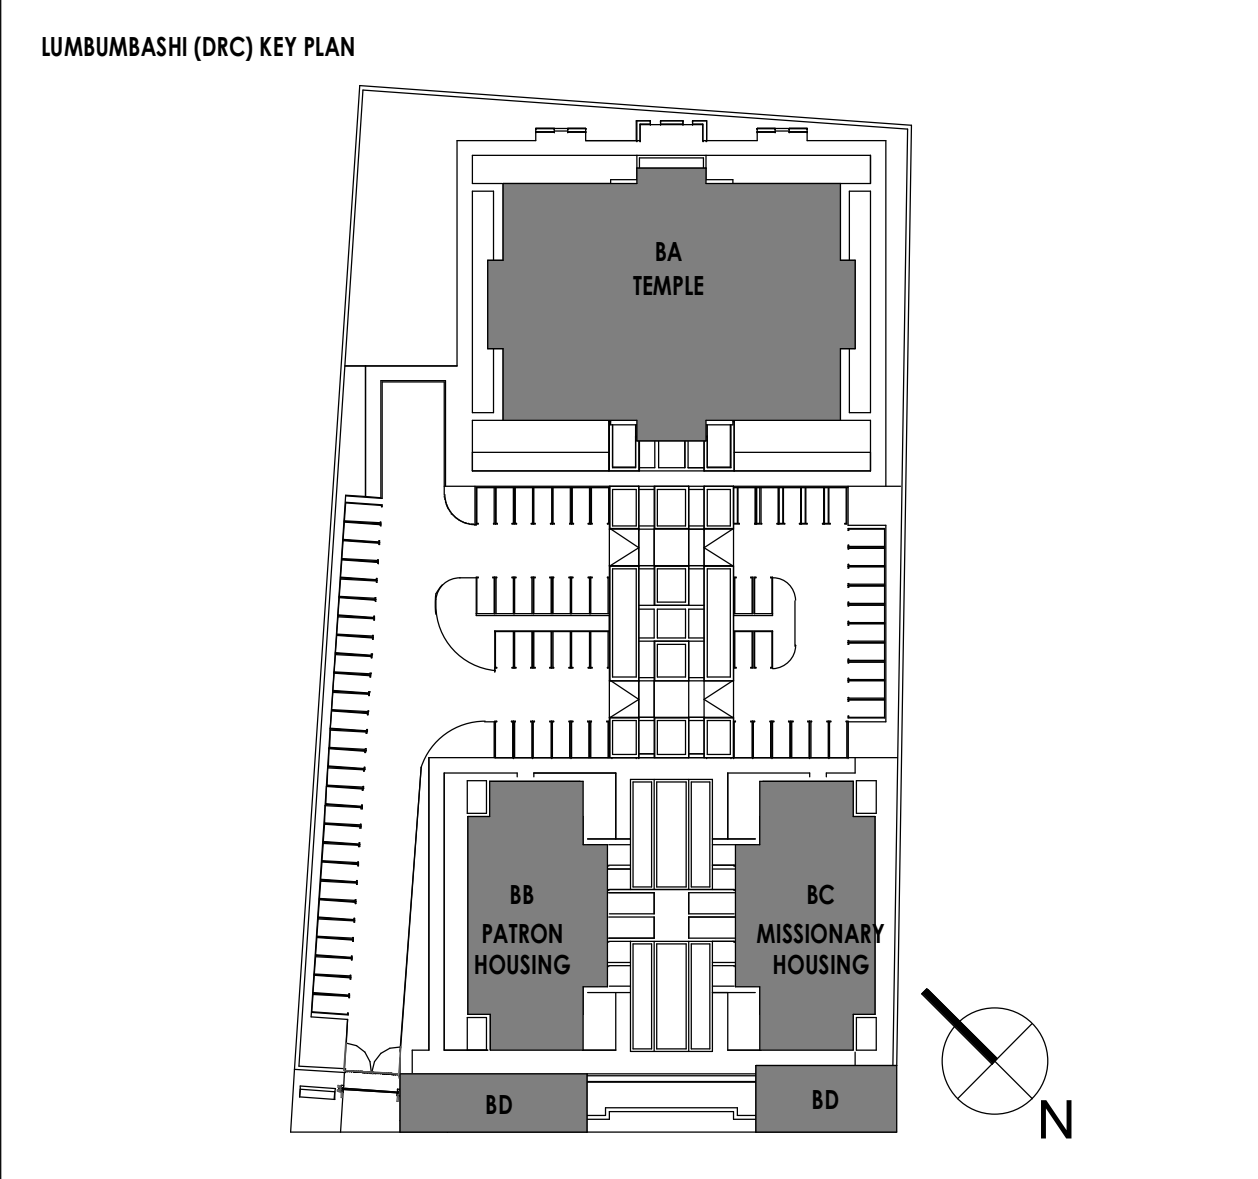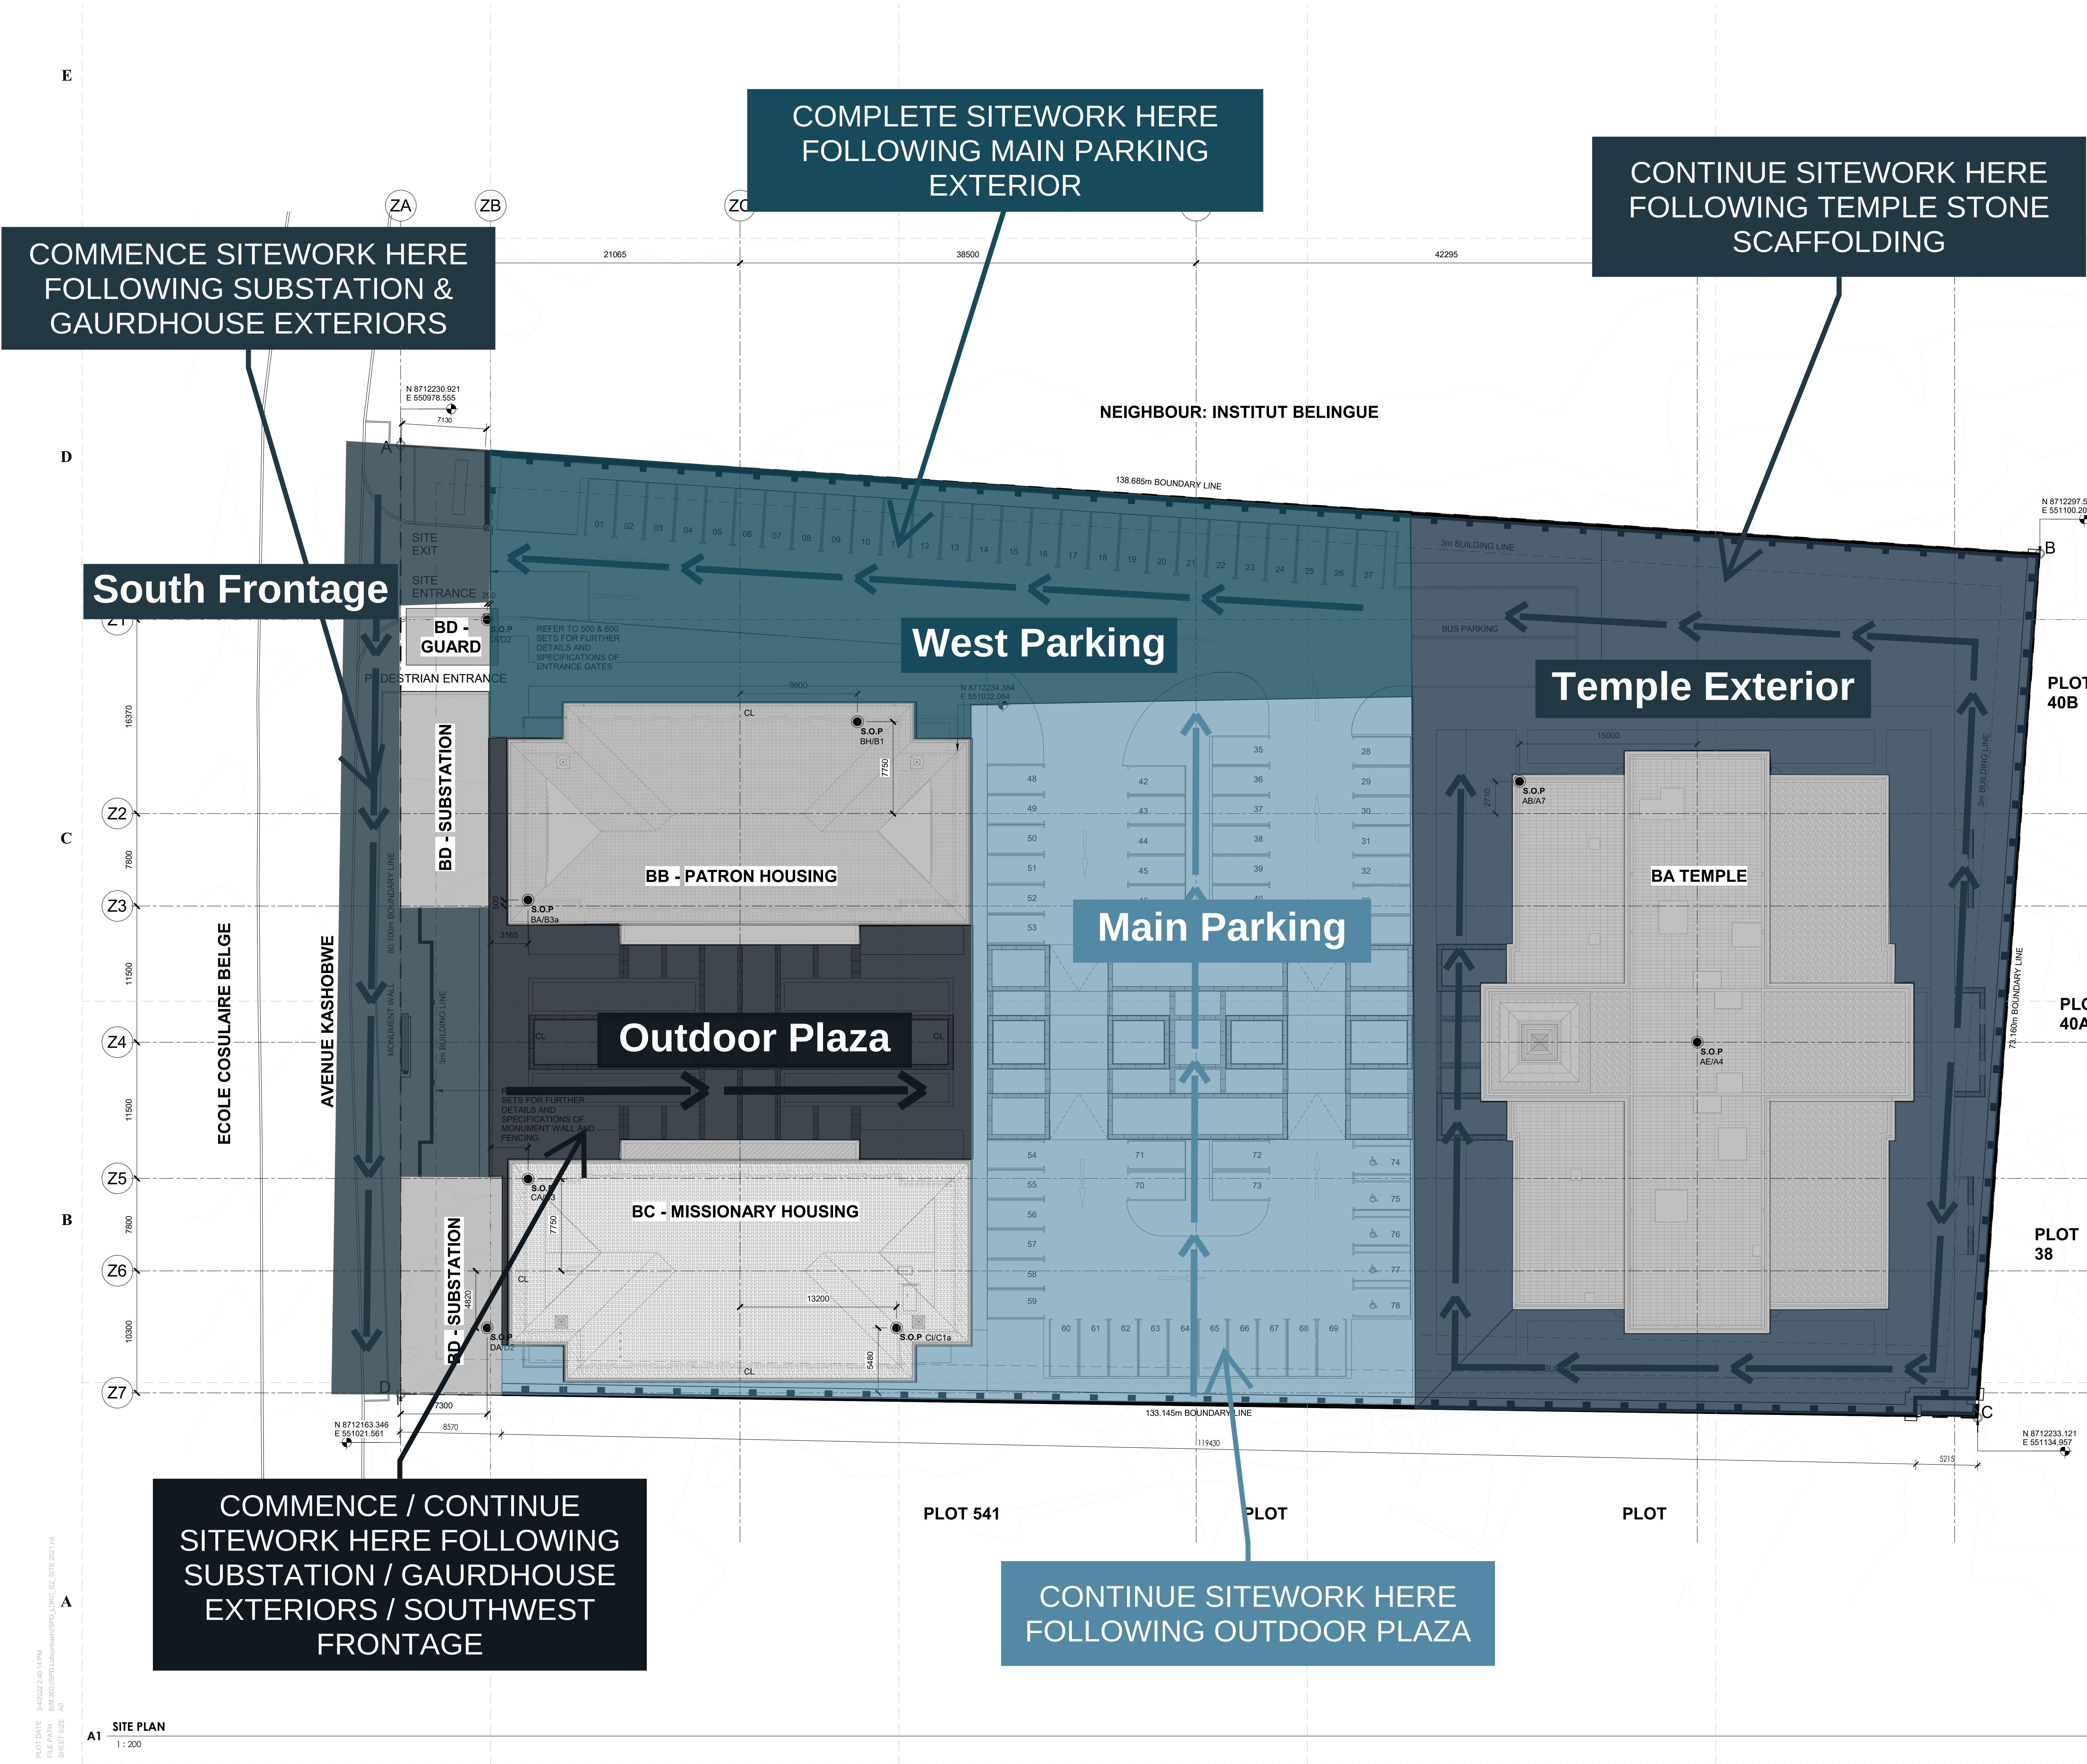

- GENERAL NOTES**
- DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
 - ALL LEVELS AND DIMENSIONS TO BE CONFIRMED ON SITE PRIOR TO PUTTING THE RESPECTIVE WORK IN HAND.
 - ANY DISCREPANCIES TO BE REPORTED TO THE ARCHITECT FOR CLARIFICATION BEFORE PUTTING THE WORK IN HAND.
 - ALL WORK TO BE CARRIED OUT STRICTLY IN ACCORDANCE WITH BUILDING REGULATIONS AND LOCAL AUTHORITY BY-LAWS AND WHERE APPLICABLE TO BE SUBJECT TO A RATIONAL DESIGN BY A REGISTERED COMPANY/PERSON.
 - NO PORTION OF PROPOSED WORK TO ENCR OACH OVER THE BOUNDARY AND ADJACENT PROPERTIES.
 - ALL STRUCTURAL, CIVIL, MECHANICAL, ELECTRICAL AND WET SERVICES WORK TO BE IN ACCORDANCE WITH PROFESSIONAL ENGINEERS DESIGN, DETAILS AND SPECIFICATIONS.
 - ALL PROFESSIONAL ENGINEERS LAYOUTS TO BE READ IN CONJUNCTION WITH ARCHITECTURAL DRAWINGS.
 - REFER TO SHEET A-BC-001 FOR SANWARE AND ELECTRICAL MOUNTING HEIGHTS AND FINISHES SCHEDULE FOR SPECIFICATIONS.
 - REFER TO SHEET A-BC-102 FOR ALL CEILING LEGENDS, CEILING NOTES, FLOOR LEGENDS AND SPECIFICATION NOTES FOR ALL 400 SERIES DRAWINGS.
 - ALL TILING DIMENSIONS ARE TO BE CHECKED PRIOR TO LAYOUT. DRY LAY MAY BE REQUIRED.
 - ALL BRICKWORK SETTING OUT POINTS ARE TO BE TAKEN FROM RAW FACE OF BRICKWORK.

- SITE NOTES & REFERENCES:**
- REFER TO LANDSCAPE ARCHITECTS DRAWINGS FOR ALL LANDSCAPING SPECIFICATIONS AND DETAILS.
 - REFER TO ENGINEER'S DRAWINGS FOR ALL CIVILS AND SITE WORKS.
 - REFER TO ENGINEER'S DRAWINGS FOR ALL STORMWATER AND SEWER SERVICES.
 - REFER TO STRUCTURAL ENGINEER'S DRAWINGS FOR ALL SITE RETAINING WALL DETAILS.
 - REFER TO ELECTRICAL ENGINEER'S DRAWINGS FOR ALL ELECTRICAL SITE WORKS.
 - SITE PLAN IS TO BE READ IN CONJUNCTION WITH LANDSCAPE ARCHITECT AND ENGINEER'S DRAWINGS.
 - ALL BUILDINGS ARE SET OUT FROM THE SITE AND BUILDING GRIDLINES AND ARE INDICATED WITH S.O.P (SETTING OUT POINT) DIMENSIONS.

SITE AREA: 10 420 m2

BUILDING AREAS - COVERAGE	
• TEMPLE	(BA): 1 495 m2
• PATRON HOUSING	(BB): 555 m2
• MISSIONARY HOUSING	(BC): 555 m2
• GUARDHOUSE & SUBSTATION	(BD): 555 m2
TOTAL COVERAGE: 2 960 m2 (28.4%)	
PARKING PROVIDED: 73 STANDARD BAYS, 5 PARAPLEGIC BAYS	


The Church of Jesus Christ of Latter-day Saints

revisions			
rev.	description	date	rev. by



LUBUMBASHI DRC TEMPLE	
Architect :	Paton Taylor Architects
Engineer :	ARUP
Landscape Architect :	Uys & White
Project Type:	New Construction
Location:	593 Avenue Kashobwe Central Lubumbashi Democratic Republic of Congo (DRC)
Submittal:	CONSTRUCTION
Date:	04 March 2022

SITE PLAN	
A-BZ-003	
Drawn By JE & HK	Checked By LAH/DLS/RP

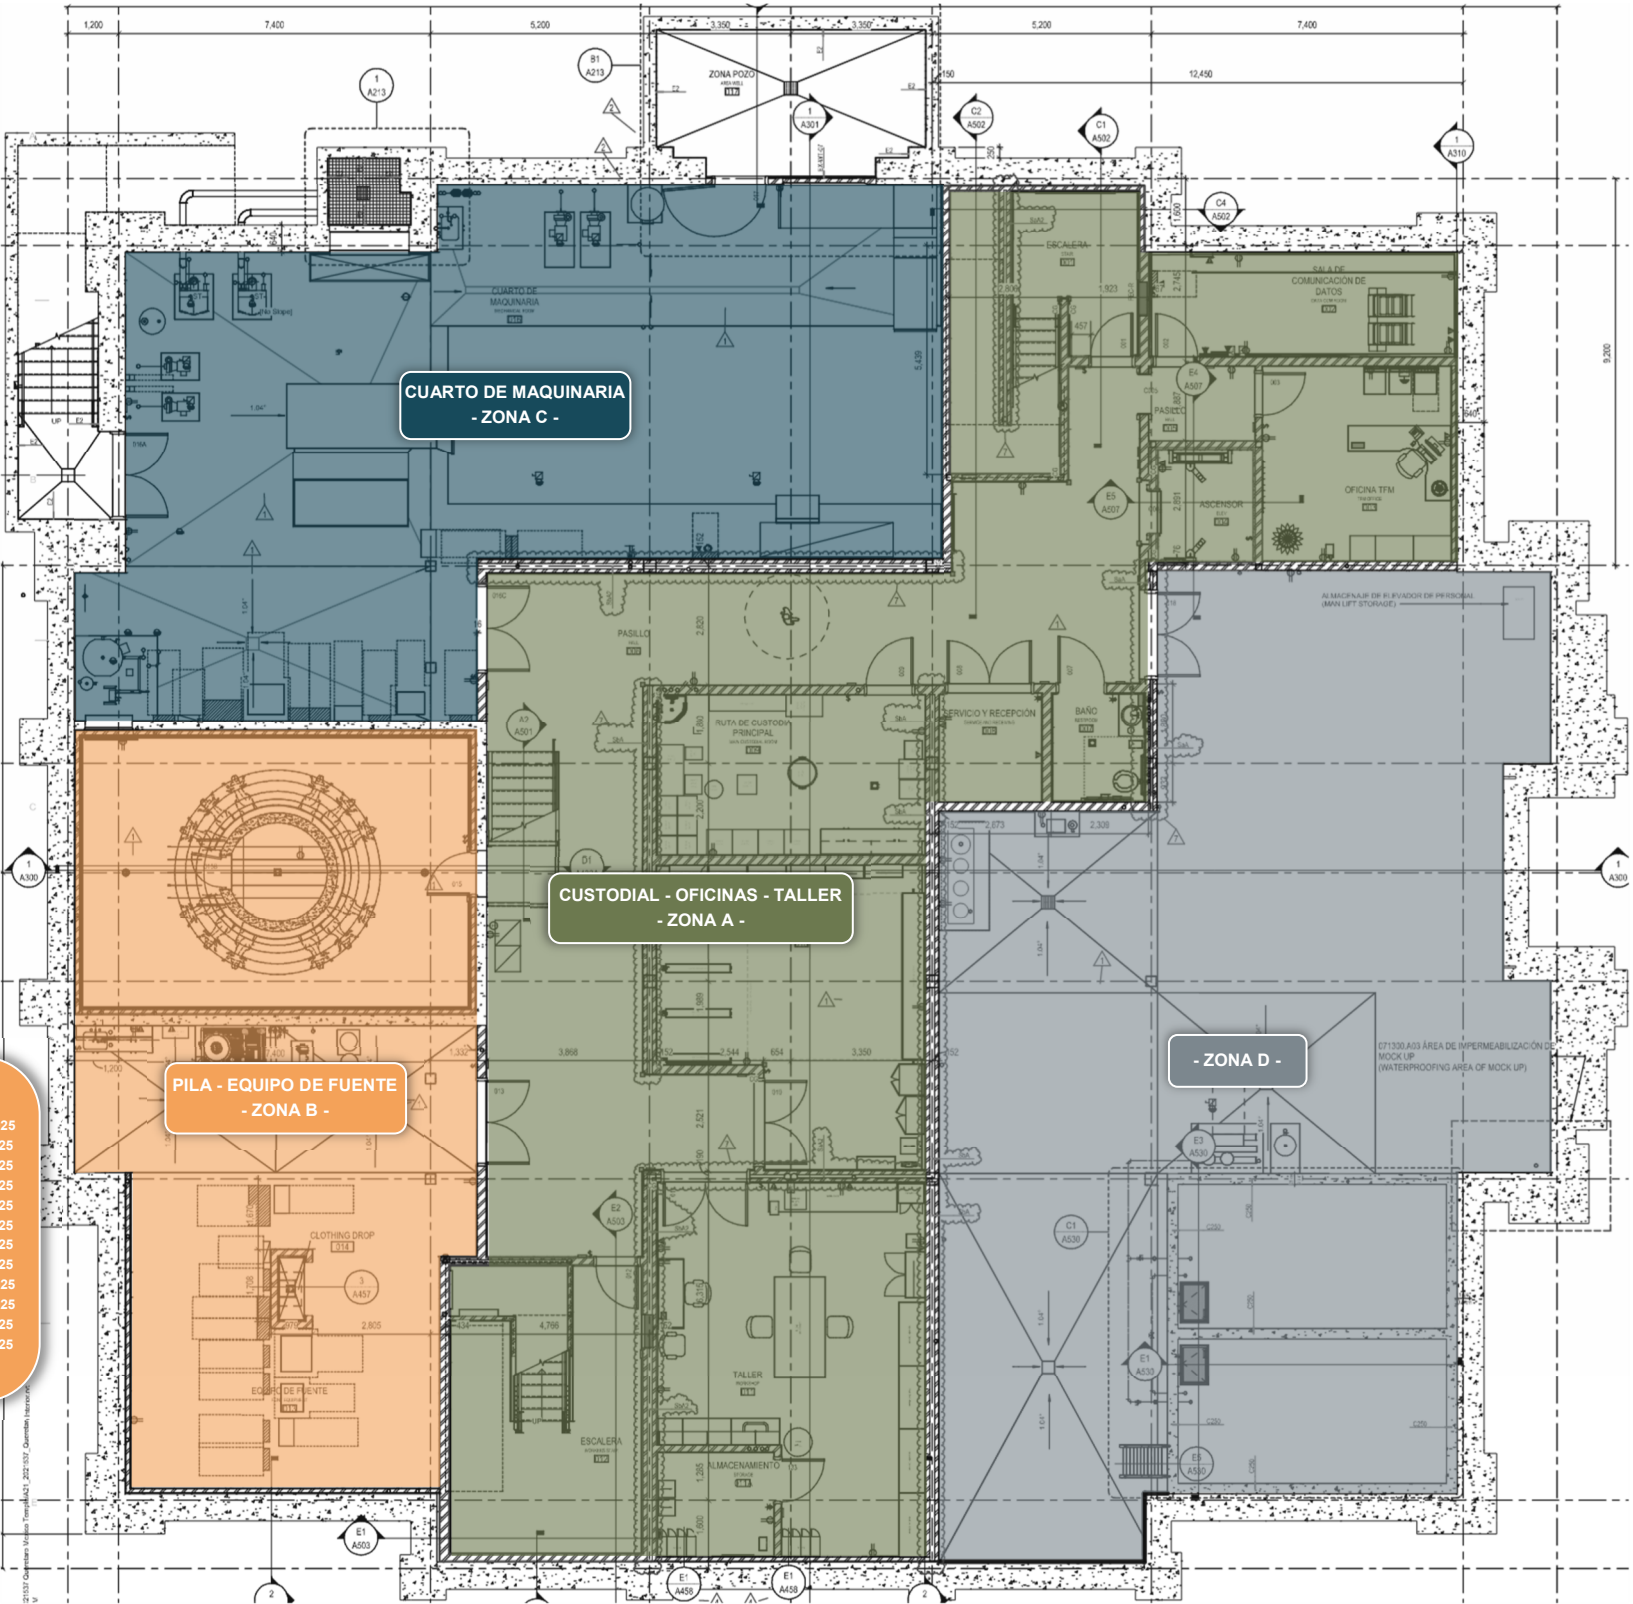

- ZONA C -

Encintado Y Acabado - Tablaroca - Muros 30-Jun-2025 A 26-Sep-2025

- ZONA A -


Encintado Y Acabado - Tablaroca - Muros	16-Jun-2025 A 15-Sep-2025
Estructuración - Plafones y Comisas	01-Jul-2025 A 15-Sep-2025
Cabina De Ascensor Y Rieles	06-Oct-2025 14-Nov-2025
Climatizar Carpintería	28-Sep-2025 09-Oct-2025
Marcos Puertas Y Molduras	10-Oct-2025 16-Oct-2025
Pintura Primaria En Plafones Y Paredes	14-Oct-2025 20-Oct-2025
Molduras De Grado Pintura	22-Sep-2025 25-Sep-2025
Control De Calidad Acabados Muros	23-Sep-2025 25-Sep-2025
Pintura Interior - Plafones - Muros	28-Sep-2025 03-Oct-2025
Climatizar Carpintería	26-Sep-2025 26-Sep-2025
Reticula Plafon Registrable	06-Oct-2025 07-Oct-2025
Gabinetas Y Cubiertas	06-Oct-2025 13-Oct-2025
Señalización	06-Oct-2025 07-Oct-2025
Pisos De Epoxico	08-Oct-2025 10-Oct-2025
Barandales y Molduras Escaleras	13-Oct-2025 17-Oct-2025
Molduras Y Perfiles Grado Esmalte	15-Oct-2025 21-Oct-2025

- ZONA B -

Encintado Y Acabado - Tablaroca - Muros	08-Jul-2025 A 17-Sep-2025
IMPACT: ASI 005 Estructuración Ligera Muros Interiores	03-Oct-2025 09-Oct-2025
IMPACT: ASI 005 Trabajos Eléctricos Preliminares - Dentro Paredes	10-Oct-2025 13-Oct-2025
IMPACT: ASI 005 Inspecciones De Contratista MEP	10-Oct-2025 13-Oct-2025
IMPACT: ASI 005 Aislamiento	14-Oct-2025 15-Oct-2025
IMPACT: ASI 005 Instalación Tablaroca - 1a Cara	14-Oct-2025 15-Oct-2025
IMPACT: ASI 005 Estructuración - Plafones y Comisas	16-Oct-2025 21-Oct-2025
IMPACT: ASI 005 Instalación Tablaroca - Muros 2da Cara	16-Oct-2025 17-Oct-2025
Estructuración - Plafones y Comisas	16-Sep-2025 18-Sep-2025
Instalación Tablaroca - Plafones	19-Sep-2025 22-Sep-2025
Encintado Y Acabado - Tablaroca - Plafones	23-Sep-2025 02-Oct-2025
Sistema De Impermeabilización	08-Oct-2025 10-Oct-2025

- ZONA D -

Encintado Y Acabado - Tablaroca - Muros 30-Jun-2025 A 02-Oct-2025

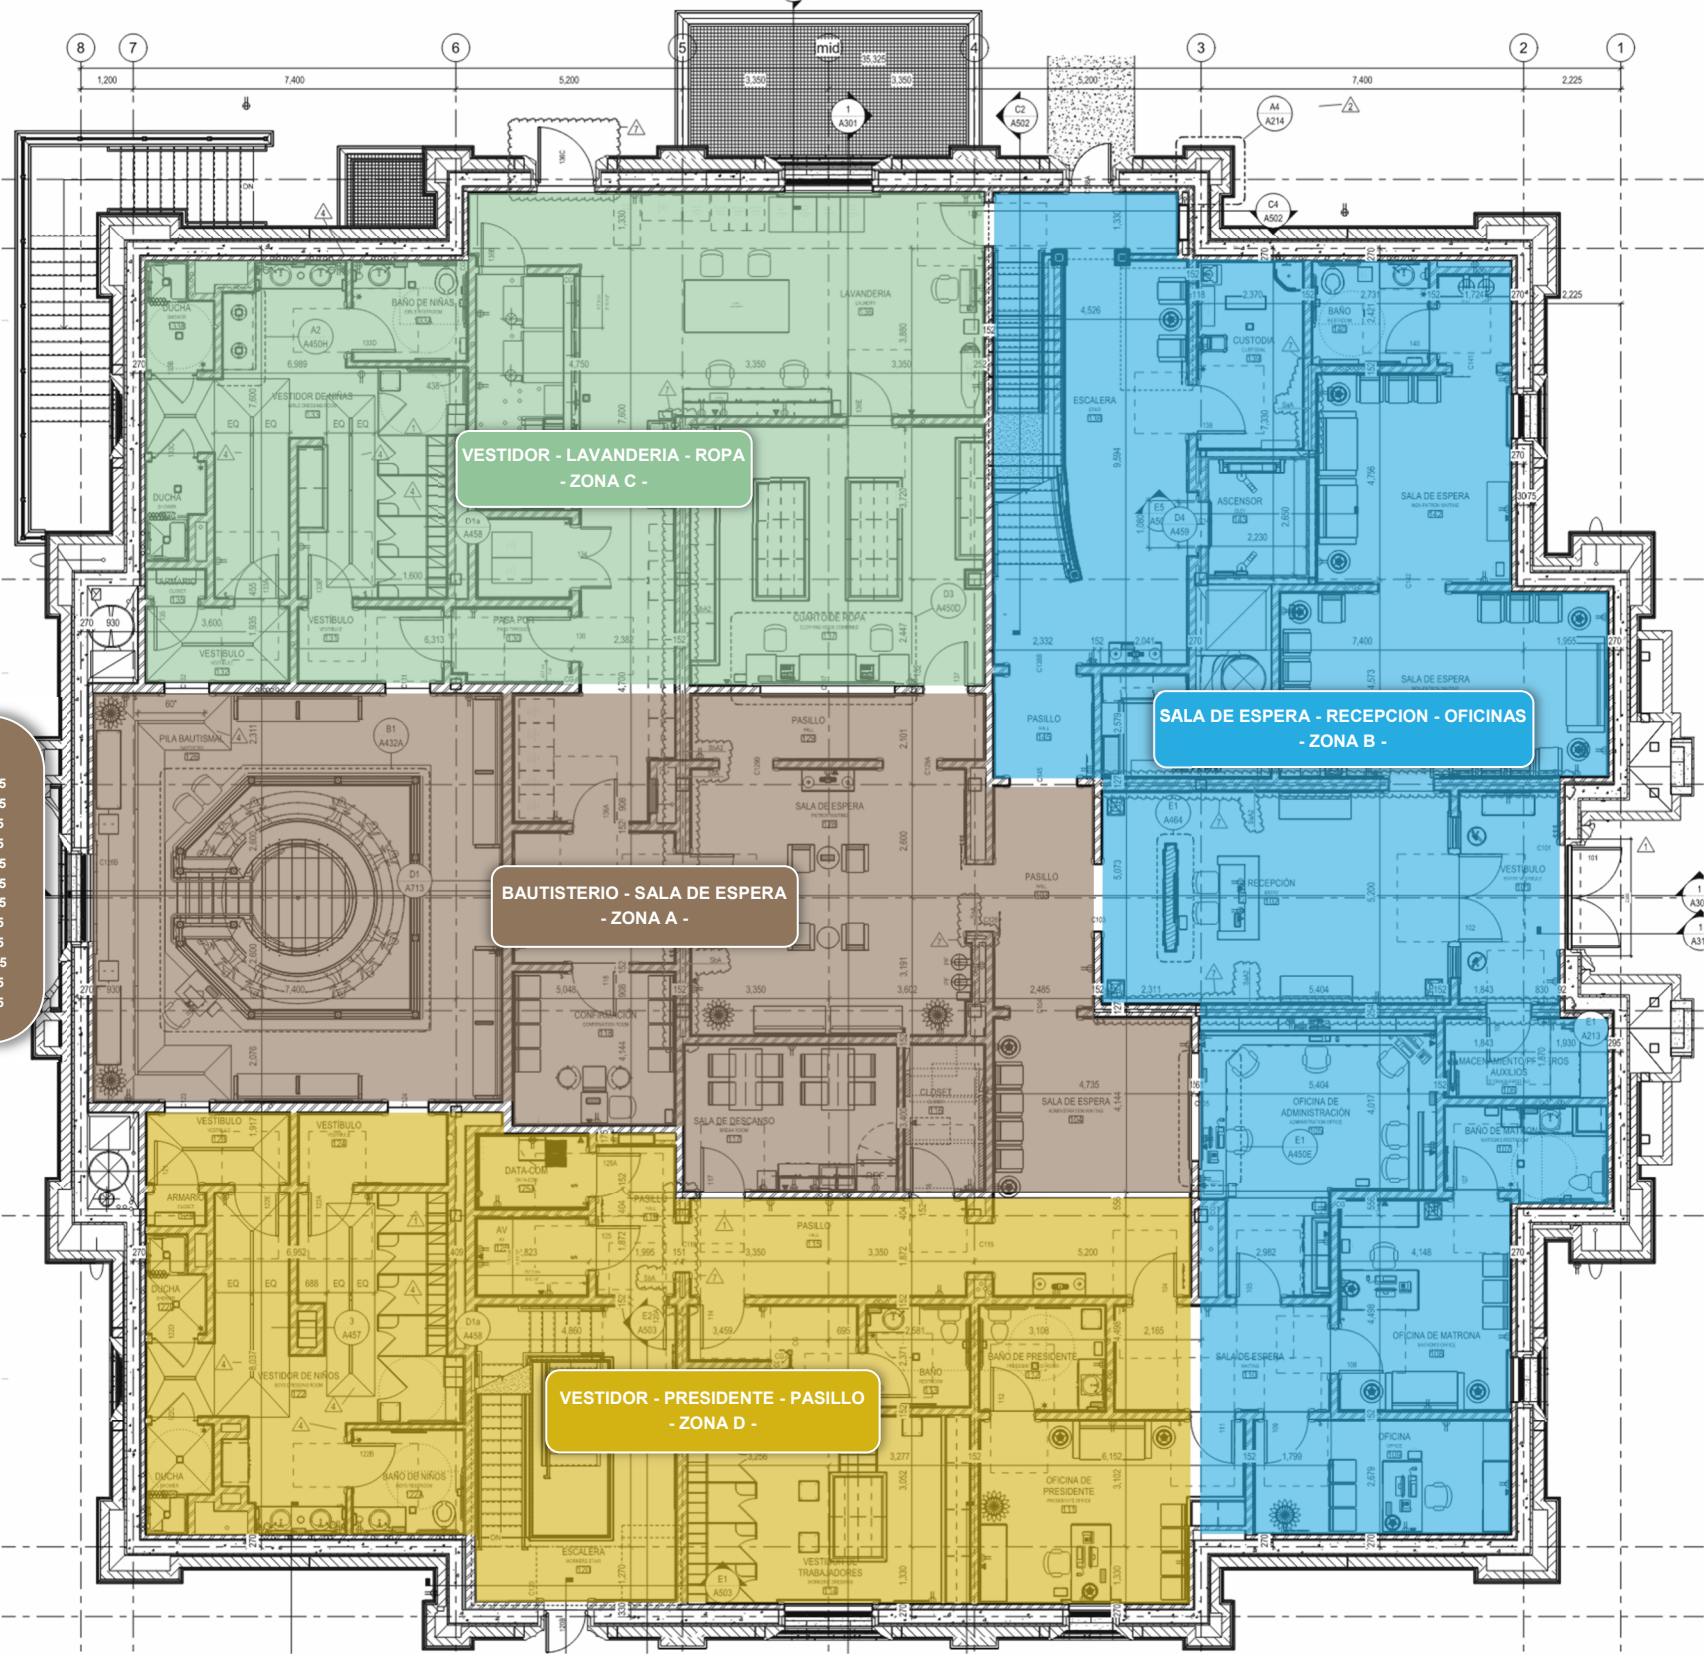

- ZONA C -

Encintado Y Acabado - Tablaroca - Muros	04-Aug-2025 A 23-Sep-2025
Estructuración - Plafones y Cornisas	09-Sep-2025 16-Sep-2025
Instalación Tablaroca - Plafones	09-Sep-2025 18-Sep-2025
IMPACT: ASI 005 Quitar Y Reestructurar Muros Y Plafones	15-Sep-2025 19-Sep-2025
IMPACT: ASI 005 Instalación Y Acabado Tablaroca	22-Sep-2025 03-Oct-2025
Encintado Y Acabado - Tablaroca - Plafones	09-Oct-2025 22-Oct-2025

- ZONA A -


Encintado Y Acabado - Tablaroca - Muros	14-Jul-2025 A 10-Sep-2025
Encintado Y Acabado - Tablaroca - Plafones 1	1-Sep-2025 24-Sep-2025
IMPACT: Instalación Estructura Sis Elev. Candelabros Del Polipasto	07-Oct-2025 13-Oct-2025
Cumplir Plafones Tablarocas - Alrededor Del Polipasto	14-Oct-2025 23-Oct-2025
Estructuración - Plafones y Cornisas	16-Sep-2025 22-Sep-2025
Encintado Y Acabado - Tablaroca - Plafones	19-Sep-2025 30-Sep-2025
Instalación Tablaroca - Plafones	23-Sep-2025 26-Sep-2025
Pintura Primaria En Muros	01-Oct-2025 07-Oct-2025
Marcos De Puertas Y Losas	01-Oct-2025 07-Oct-2025
Instalación Sis. De Piedra Paredes	08-Oct-2025 04-Nov-2025
Marcos Puertas Y Molduras - Equipo 1	08-Oct-2025 14-Oct-2025
Pintura Primaria En Plafones Y Paredes	10-Oct-2025 16-Oct-2025

- ZONA D -

Estructuración - Plafones y Cornisas	22-Aug-2025 A 24-Sep-2025
Instalación Tablaroca - Plafones	17-Sep-2025 26-Sep-2025
Encintado Y Acabado - Tablaroca - Muros	24-Sep-2025 03-Oct-2025

- ZONA B -

Encintado Y Acabado - Tablaroca - Muros	28-Jul-2025 A 12-Sep-2025
Estructuración - Plafones y Cornisas	07-Aug-2025 A 15-Sep-2025
Instalación Tablaroca - Plafones	08-Sep-2025 17-Sep-2025
Encintado Y Acabado - Tablaroca - Plafones	25-Sep-2025 08-Oct-2025
Marcos Puertas Y Molduras - Equipo 2	10-Oct-2025 16-Oct-2025
Pintura Primaria En Plafones Y Paredes	14-Oct-2025 20-Oct-2025

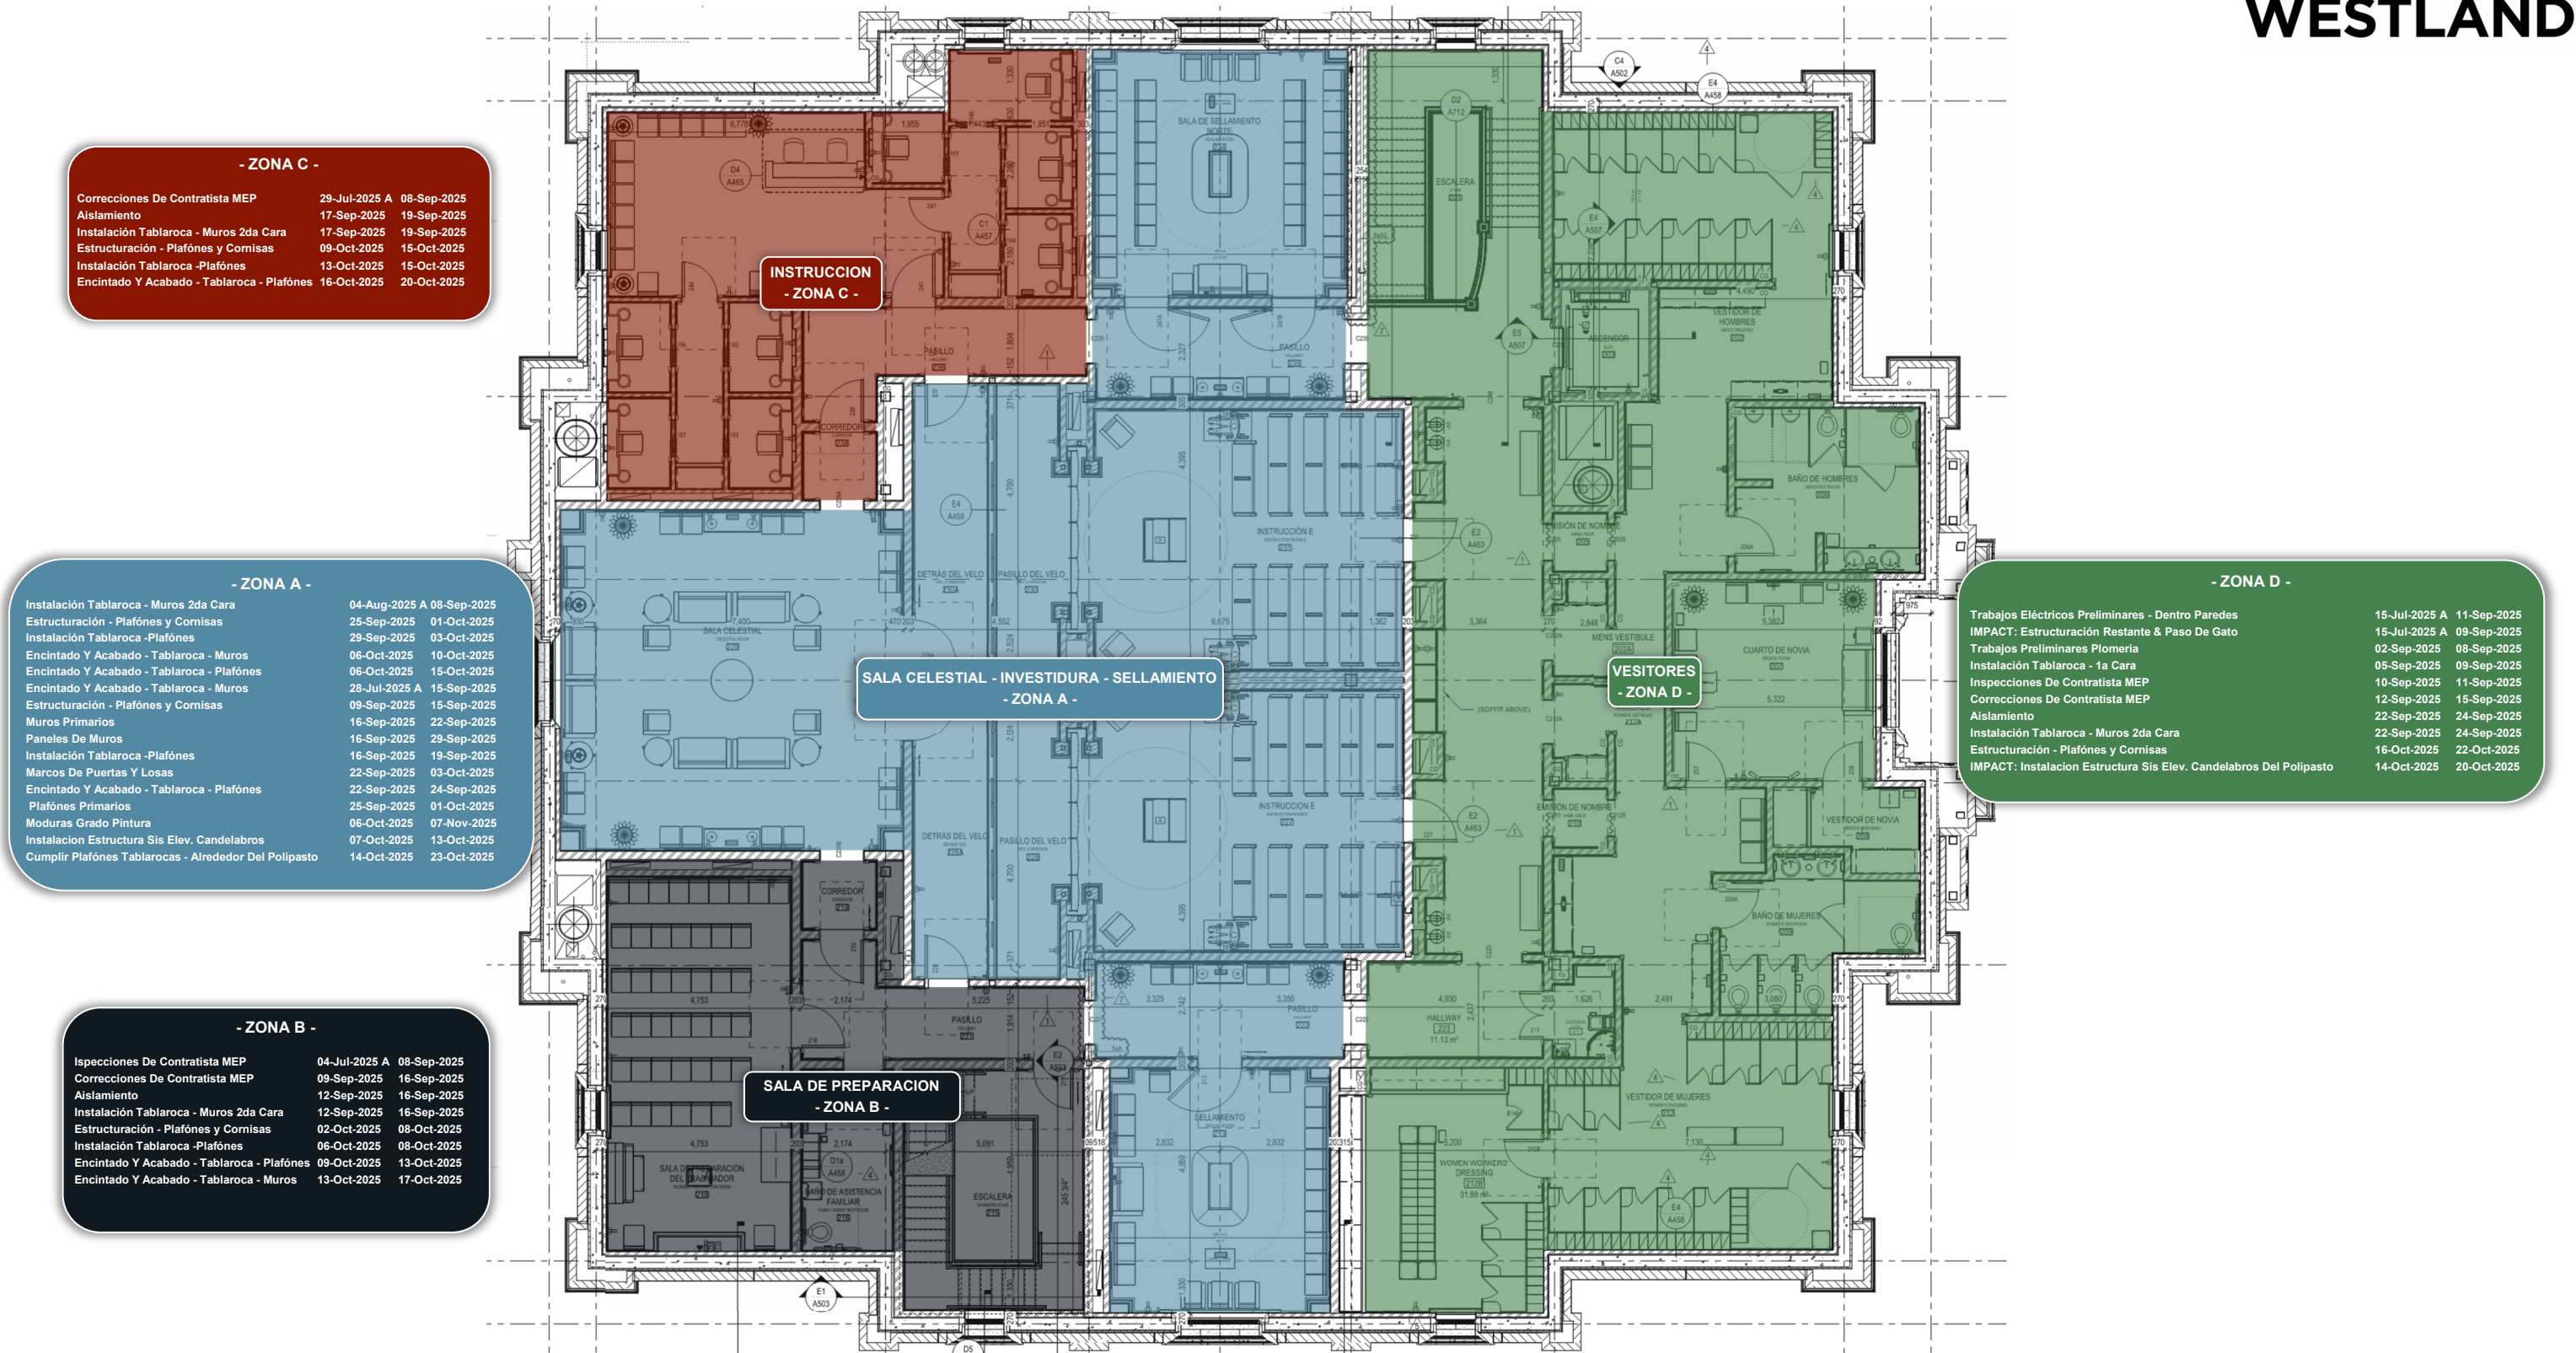

Schedule Impact & Mitigation Summary Report

Pago Pago - American Samoa Temple Project



Structural Steel SSSF Approval & Design Delays

Pre-impact Schedule Update / Comparison Baseline: 4-Aug-21

1. Schedule Update Impacted:	18-Nov-22	
2. ImpactType:	Delayed Start	
3. Activity Impacted:	L1-60 Install Structural Steel	Baseline Critical Path? Yes
4. Predecessor at time of Impact:	645 Masonry Concrete	Baseline Critical Path? Yes
5. Successor at Time of Impact:	EX-100 Roofing System	Baseline Critical Path? Yes
6. Baseline Start:	1-Apr-22	Baseline Finish: 24-May-22
7. Impacted Start:	27-Jun-23	Impacted Finish: 22-Sep-23
8. Total Impact Days:	486 Days	
9. Total Days Mitigated by Contractor:	121 Days	Please note: Activity L1-60 was divided to reflect updated sequencing.

10. Schedule Filter Showing Impact Fragnet: See additional attached critical path schedules.

ID	Description	Original Duration	Start	Finish	J	Jul	Aug	Sep	Oct	Nov	Dec	Jan
TEMPLE CONSTRUCTION		375	03/07/23	12/12/24								
STRUCTURE & SUBROUGH		46	03/07/23	10/23/23								
DELAYS TO STRUCTURAL STEEL SSSF PROCESS & PROCUREMENT		80	06/29/23	10/23/23								
L1 - 60	Install Structural Steel - Level 1	15	06/29/23	07/20/23								
L1 - 61	Block Walls & Bond Beams - Tied To Steel	8	07/07/23	07/18/23								
L1 - 70	Mezzanine floor Concrete	10	07/21/23	08/03/23								
L1 - 53	L2 Masonry / Concrete	20	08/04/23	08/31/23								
L1 - 91	Structural Steel Lower Roof	15	08/04/23	08/24/23								
L1 - 93	Framing & Sheathing - Lower Roof & Gutters	20	08/11/23	09/08/23								
L1 - 92	Structural Steel Upper Roof	15	09/01/23	09/22/23								
L1 - 94	Framing & Sheathing - Upper Roof & Gutters	30	09/11/23	10/23/23								
L1 - 99	Spire Concrete	9	09/25/23	10/05/23								

11. Overall Impact to to Substantial Completion: 365 Days Baseline: 29-Feb-24 Impacted: 28-Feb-25

12. Series of events driving the impact:

COVID-19 travel and work restrictions seriously hampered efforts to bid and buy out the project. These delays were further complicated during the SSSF third party review process which prevented timely execution of the trade contract for the structural steel package. During that initial delay steel pricing increased significantly and this required a change in sourcing of the structural steel to meet project budget constraints. After the project team elected to approve a structural steel package sourced in China and directed Westland to proceed with procurement, the structural engineer repeatedly rejected the alternate steel package submittals and eventually ownership directed us to stop work on structural steel procurement while they revisited the issue and held off on a final decision. After weeks of discussion and correspondence we were directed to proceed again with the alternate steel, but with additional requirements to develop a custom quality assurance program to demonstrate the steel would meet or exceed New Zealand standards rather than ASTM standards. The custom process, added weeks to the submittal process. The initial hesitation to approve the SSSF, the indecision regarding Chinese steel, the direction to stop work, the extended submittal process, and the most recent COVID-19 breakout and subsequent lockdowns in China have had, and continue to have, a dramatic impact on our procurement process, delaying the start and completion of critical path work by a full year.

13. For items 3-5 above not baseline critical, series of events that made them critical:

Not applicable to this delay. Structural steel was always critical.

14. For item 9 above, detail Contractor intervention and mitigation efforts:

After significant delays and challenges gaining approval to enter the country, Westland sent our project team to American Samoa on June 6, 2021. After weeks of quarantine in several locations the team was released to go to work on June 23rd, 2021, one day before the Prime Contract for the Pago Pago temple was executed. Our early mobilization effort helped us avoid the additional delay of roughly 4 weeks had we waited for contract execution. At every step of the SSSF and product approval process Westland sought to produce accurate and timely information for team review. We had implemented an aggressive schedule and initially planned to complete the work one month ahead of schedule to facilitate punch-list and closeout. In addition, we have since made multiple adjustments to the logic and sequencing of our schedule to mitigate the impact of these extended delays. This includes sacrificing any float we initially had, adjusting logic and optimising sequencing to reduce the critical path, and hiring a new steel erctor to improve efficiency once on site. We have continued to push our steel fabricator for expedited fabrication and shipping. This has been extremely challenging in the current market. However, we have been able to reduce the overall potential impact to project completion by 121 days.

COST IMPACT AVOIDANCE / MITIGATION EFFORTS

PAGO PAGO - AMERICAN SAMOA TEMPLE



STRUCTURAL STEEL APPROVAL AND PROCUREMENT DELAYS

Delay Cost Summary

Description	Cost	Notes
General Conditions Cost Per Month	\$ 222,167.51	
Deduct Single Occurance Lump Sum GC Costs	\$ (18,510.35)	Includes facilities, equipment, etc.
General Conditions Costs Loss / Month	\$ 203,657.16	
General Conditions Costs Loss / Day	\$ 6,719.14	4.33 weeks / month average
Compensable Delay Days:	243 Days	
Total General Conditions Loss:	\$ 1,632,751.23	

Delay Cost Avoidance Summary

Description	Quantity / Cost	Notes
Modify logic, sacrifice float, reduce durations, break up scope	-121 Days	Multiple adjustments through the year
Delay Days Mitigated:	-121 Days	
Delay Days Absorbed:	-55 Days	
General Conditions Cost / Day:	\$ 6,719.14	
Total Cost Avoidance / Mitigation:	\$ (1,182,568.79)	Includes 55 days absorbed by Westland
Westland Acceleration Measures:	\$ (450,182.44)	Value of Westland 67 day acceleration

Change Order Summary

Description	Quantity / Cost	Notes
Requested Delay Days:	298 Days	
Requested Compensable Days:	243 Days	
Variance In Days:	-55 Days	
Westland Cost - Excluding Acceleration:	\$ (369,552.75)	Delay costs Westland is absorbing
SPD Cost	\$ 1,632,751.23	Cost before bonds & insurance

	ID	Description	Original Duration	Start	Finish	2023
						Jan
WELLINGTON NEW ZEALAND TEMPLE			797	11/02/22A	12/11/25	
SUMMARY & MILESTONES			418	11/09/22	12/11/25	
DESIGN - A/E SELECTION & SCHEDULE INPUT PENDING			212	12/01/22	10/20/23	
DESIGN DEVELOPMENT			170	12/01/22	08/22/23	
CONSTRUCTION DOCUMENTS			40	08/23/23	10/20/23	
PERMIT / CONSENT PROCESS			30	08/07/23	09/15/23	
PRECONSTRUCTION			432	11/02/22A	08/20/24	
PROPOSAL & AWARD			40	11/02/22A	01/25/23	
WESTLAND PRECONSTRUCTION DELIVERABLES			168	02/13/23	01/10/24	
ESTIMATES - SCHEDULES - CONSTRUCTABILITY REPORTS			110	02/13/23	12/04/23	
BIM MODELING			88	04/28/23	08/29/23	
NOTICE TO PROCEED			0	01/10/24	01/10/24	
EARLY PROCUREMENT PRIORITY ITEMS			187	12/04/23	08/20/24	
MATERIALS REQUIRING RELEASE PRIOR TO NTP			150	12/04/23	06/28/24	
PRIORITY MATERIALS REQUIRING EARLY EMPHASIS			160	01/10/24	08/20/24	
TRADE CONTRACTOR PRE-QUALIFICATION & BUY OUT			196	01/26/23	04/01/24	
TRADE PREQUALIFICATION			100	01/26/23	06/14/23	
SITEWORK & UTILITIES			90	01/26/23	05/31/23	
STRUCTURE & CONCRETE			90	01/26/23	06/14/23	
MECHANICAL - ELECTRICAL - PLUMBING - FIRE			90	01/26/23	05/31/23	
FINISH SYSTEMS			90	01/26/23	05/31/23	
LANDSCAPING			90	01/26/23	05/31/23	
PROJECT BUYOUT			96	11/03/23	04/01/24	
PROCUREMENT			190	11/10/22	08/28/23	
SUBMITTALS - APPROVALS - FABRICATION - DELIVERY			190	11/10/22	08/28/23	
CONCRETE			110	11/10/22	05/08/23	
REINFORCING STEEL - REBAR			75	11/10/22	03/14/23	
BAPTISTRY FONT			110	11/10/22	05/08/23	
SITE FENCE			100	11/10/22	04/21/23	
MASONRY			175	11/10/22	08/07/23	
EXTERIOR STONE			175	11/10/22	08/07/23	
INTERIOR STONE			100	11/10/22	04/21/23	
METALS			160	11/10/22	07/17/23	
STRUCTURAL STEEL			155	11/10/22	07/10/23	
BOLT PATTERNS - ANCHOR BOLTS - EMBEDS			45	11/10/22	01/27/23	
STRUCTURAL COLUMNS & BEAMS			155	11/10/22	07/10/23	

	ID	Description	Original Duration	Start	Finish	2023
						Jan
		TOWER STEEL	155	11/10/22	07/10/23	
		DECORATIVE METAL GRILLES	145	11/10/22	06/26/23	
		CUSTOM DOOR PULLS & HARDWARE	160	11/10/22	07/17/23	
		DECORATIVE BAPTISTRY HANDLES	160	11/10/22	07/17/23	
		SPIRE	120	11/10/22	05/22/23	
		WOODS - PLASTICS - COMPOSITES	90	11/10/22	04/05/23	
		PAINT GRADE MILLWORK	80	11/10/22	03/22/23	
		STAIN GRADE MILLWORK	80	11/10/22	03/22/23	
		SPIRE BASE	80	11/10/22	03/22/23	
		OXEN	90	11/10/22	04/05/23	
		OPENINGS - WINDOWS & DOORS	120	11/10/22	05/22/23	
		ART GLASS	120	11/10/22	05/22/23	
		WINDOWS	120	11/10/22	05/22/23	
		MAIN ENTRY DOOR SYSTEM	100	11/10/22	04/21/23	
		FINISH SYSTEMS	130	11/10/22	06/05/23	
		DECORATIVE PAINTING	130	11/10/22	06/05/23	
		EQUIPMENT	66	11/10/22	03/01/23	
		CHANDALIER HOISTS	65	11/10/22	02/28/23	
		COMMERCIAL WASHER - DRYER	66	11/10/22	03/01/23	
		ELEVATOR	160	11/10/22	07/17/23	
		PLUMBING	60	11/10/22	02/20/23	
		GENERAL PLUMBING MATERIALS	60	11/10/22	02/20/23	
		PLUMBING EQUIPMENT - PUMPS - WATER HEATERS - WATER COOLERS -	60	11/10/22	02/20/23	
		PLUMBING FIXTURES	60	11/10/22	02/20/23	
		HVAC	120	11/10/22	05/22/23	
		BOILERS	120	11/10/22	05/22/23	
		CHILLERS	120	11/10/22	05/22/23	
		AIR HANDLERS - ECONOMIZERS - VAVs - EXHAUST SYSTEMS - ETC.	120	11/10/22	05/22/23	
		ELECTRICAL	190	11/10/22	08/28/23	
		TRANSFORMER & MAIN SERVICE EQUIPMENT	190	11/10/22	08/28/23	
		DISTRIBUTION PANEL BOARDS	80	11/10/22	03/22/23	
		GENERATOR	70	11/10/22	03/07/23	
		DECORATIVE LIGHTING	100	11/10/22	04/21/23	
		CONSTRUCTION	517	12/04/23	12/11/25	
	W5050	Notice to Proceed	0	01/10/24		
		SITEWORK	489	12/04/23	11/19/25	

	ID	Description	Original Duration	Start	Finish	2023
						Jan
PRECONSTRUCTION SITE ITEMS			13	12/04/23	01/05/24	
INITIAL SITEWORK			191	01/08/24	09/30/24	
BALANCE OF SITEWORK			205	01/09/25	11/19/25	
ORNAMENTAL FENCE			105	10/01/24	03/10/25	
TEMPLE CONSTRUCTION			468	02/13/24	12/11/25	
STRUCTURE & SUBROUGH			166	02/13/24	10/01/24	
LEVEL ONE - STRUCTURE & SUBROUGH			135	02/13/24	08/19/24	
LEVEL TWO - STRUCTURE			45	06/25/24	08/26/24	
MECHANICAL MEZZANINE LEVEL - STRUCTURE			51	07/16/24	09/24/24	
TOWERS & SPIRES - STRUCTURE			25	08/28/24	10/01/24	
EXTERIOR CLOSURE - WINDOWS - FINISH SYSTEMS			245	08/13/24	08/04/25	
ROOFING SYSTEM & DRY-IN			57	08/28/24	12/03/24	
NORTH FACE - EXTERIOR CLOSURE			117	08/13/24	02/05/25	
EAST FACE - EXTERIOR CLOSURE			97	09/03/24	03/05/25	
SOUTH FACE - EXTERIOR CLOSURE			122	09/24/24	05/07/25	
WEST FACE - EXTERIOR CLOSURE			100	10/15/24	06/04/25	
TOWERS & SPIRES			135	10/02/24	08/04/25	
INTERIOR ROUGH IN & FINISH			333	08/20/24	12/11/25	
FIRST FLOOR - BAPTISTRY - DRESSING - LAUNDRY - ADMIN			241	08/20/24	08/05/25	
SECOND FLOOR - CELESTIAL - SEALING - INSTRUCTION - DRESSNG			228	09/10/24	08/07/25	
MECHANICAL MEZZANINE			183	10/15/24	07/10/25	
CORRIDORS & ENTRY REPAIRS			38	06/20/25	08/12/25	
COMMISSIONING & CLOSEOUT - TEMPLE			162	04/30/25	12/11/25	
ANCILLARY BUILDING			411	02/23/24	10/21/25	
STRUCTURE & SUBROUGH			103	02/23/24	08/15/24	
FIRST FLOOR - STRUCTURE & SUBROUGH			97	02/23/24	08/07/24	
SECOND FLOOR - STRUCTURE & SUBROUGH			21	07/18/24	08/15/24	
BUILDING ENCLOSURE - WINDOWS - FINISH SYSTEMS			125	08/16/24	02/06/25	
ROOFING SYSTEM			32	08/16/24	10/15/24	
EAST BUILDING EXTERIOR			39	08/16/24	10/25/24	
SOUTH BUILDING EXTERIOR			47	08/23/24	11/04/24	
NORTH BUILDING EXTERIOR			48	08/30/24	11/28/24	
WEST BUILDING EXTERIOR			80	09/06/24	02/06/25	
INTERIOR ROUGH IN & FINISH SYSTEMS			246	08/08/24	07/17/25	
FIRST FLOOR - ROUGH & FINISH			210	08/08/24	06/12/25	
SECOND FLOOR - ROUGH & FINISH			210	08/29/24	07/17/25	

Page 4A

Approved Westland Colors



Black
16 Red
24 Green
32 Blue
HEX #101820



Westland Grey 1
124 Red
135 Green
142 Blue
HEX #7C878E



Westland Teal
23 Red
74 Green
91 Blue
HEX #174A5B




Westland Grey 2
152 Red
164 Green
174 Blue
HEX #98A4AE



Westland Blue
84 Red
137 Green
163 Blue
HEX #5489A3




Navy
0 Red
57 Green
93 Blue
HEX #00395D

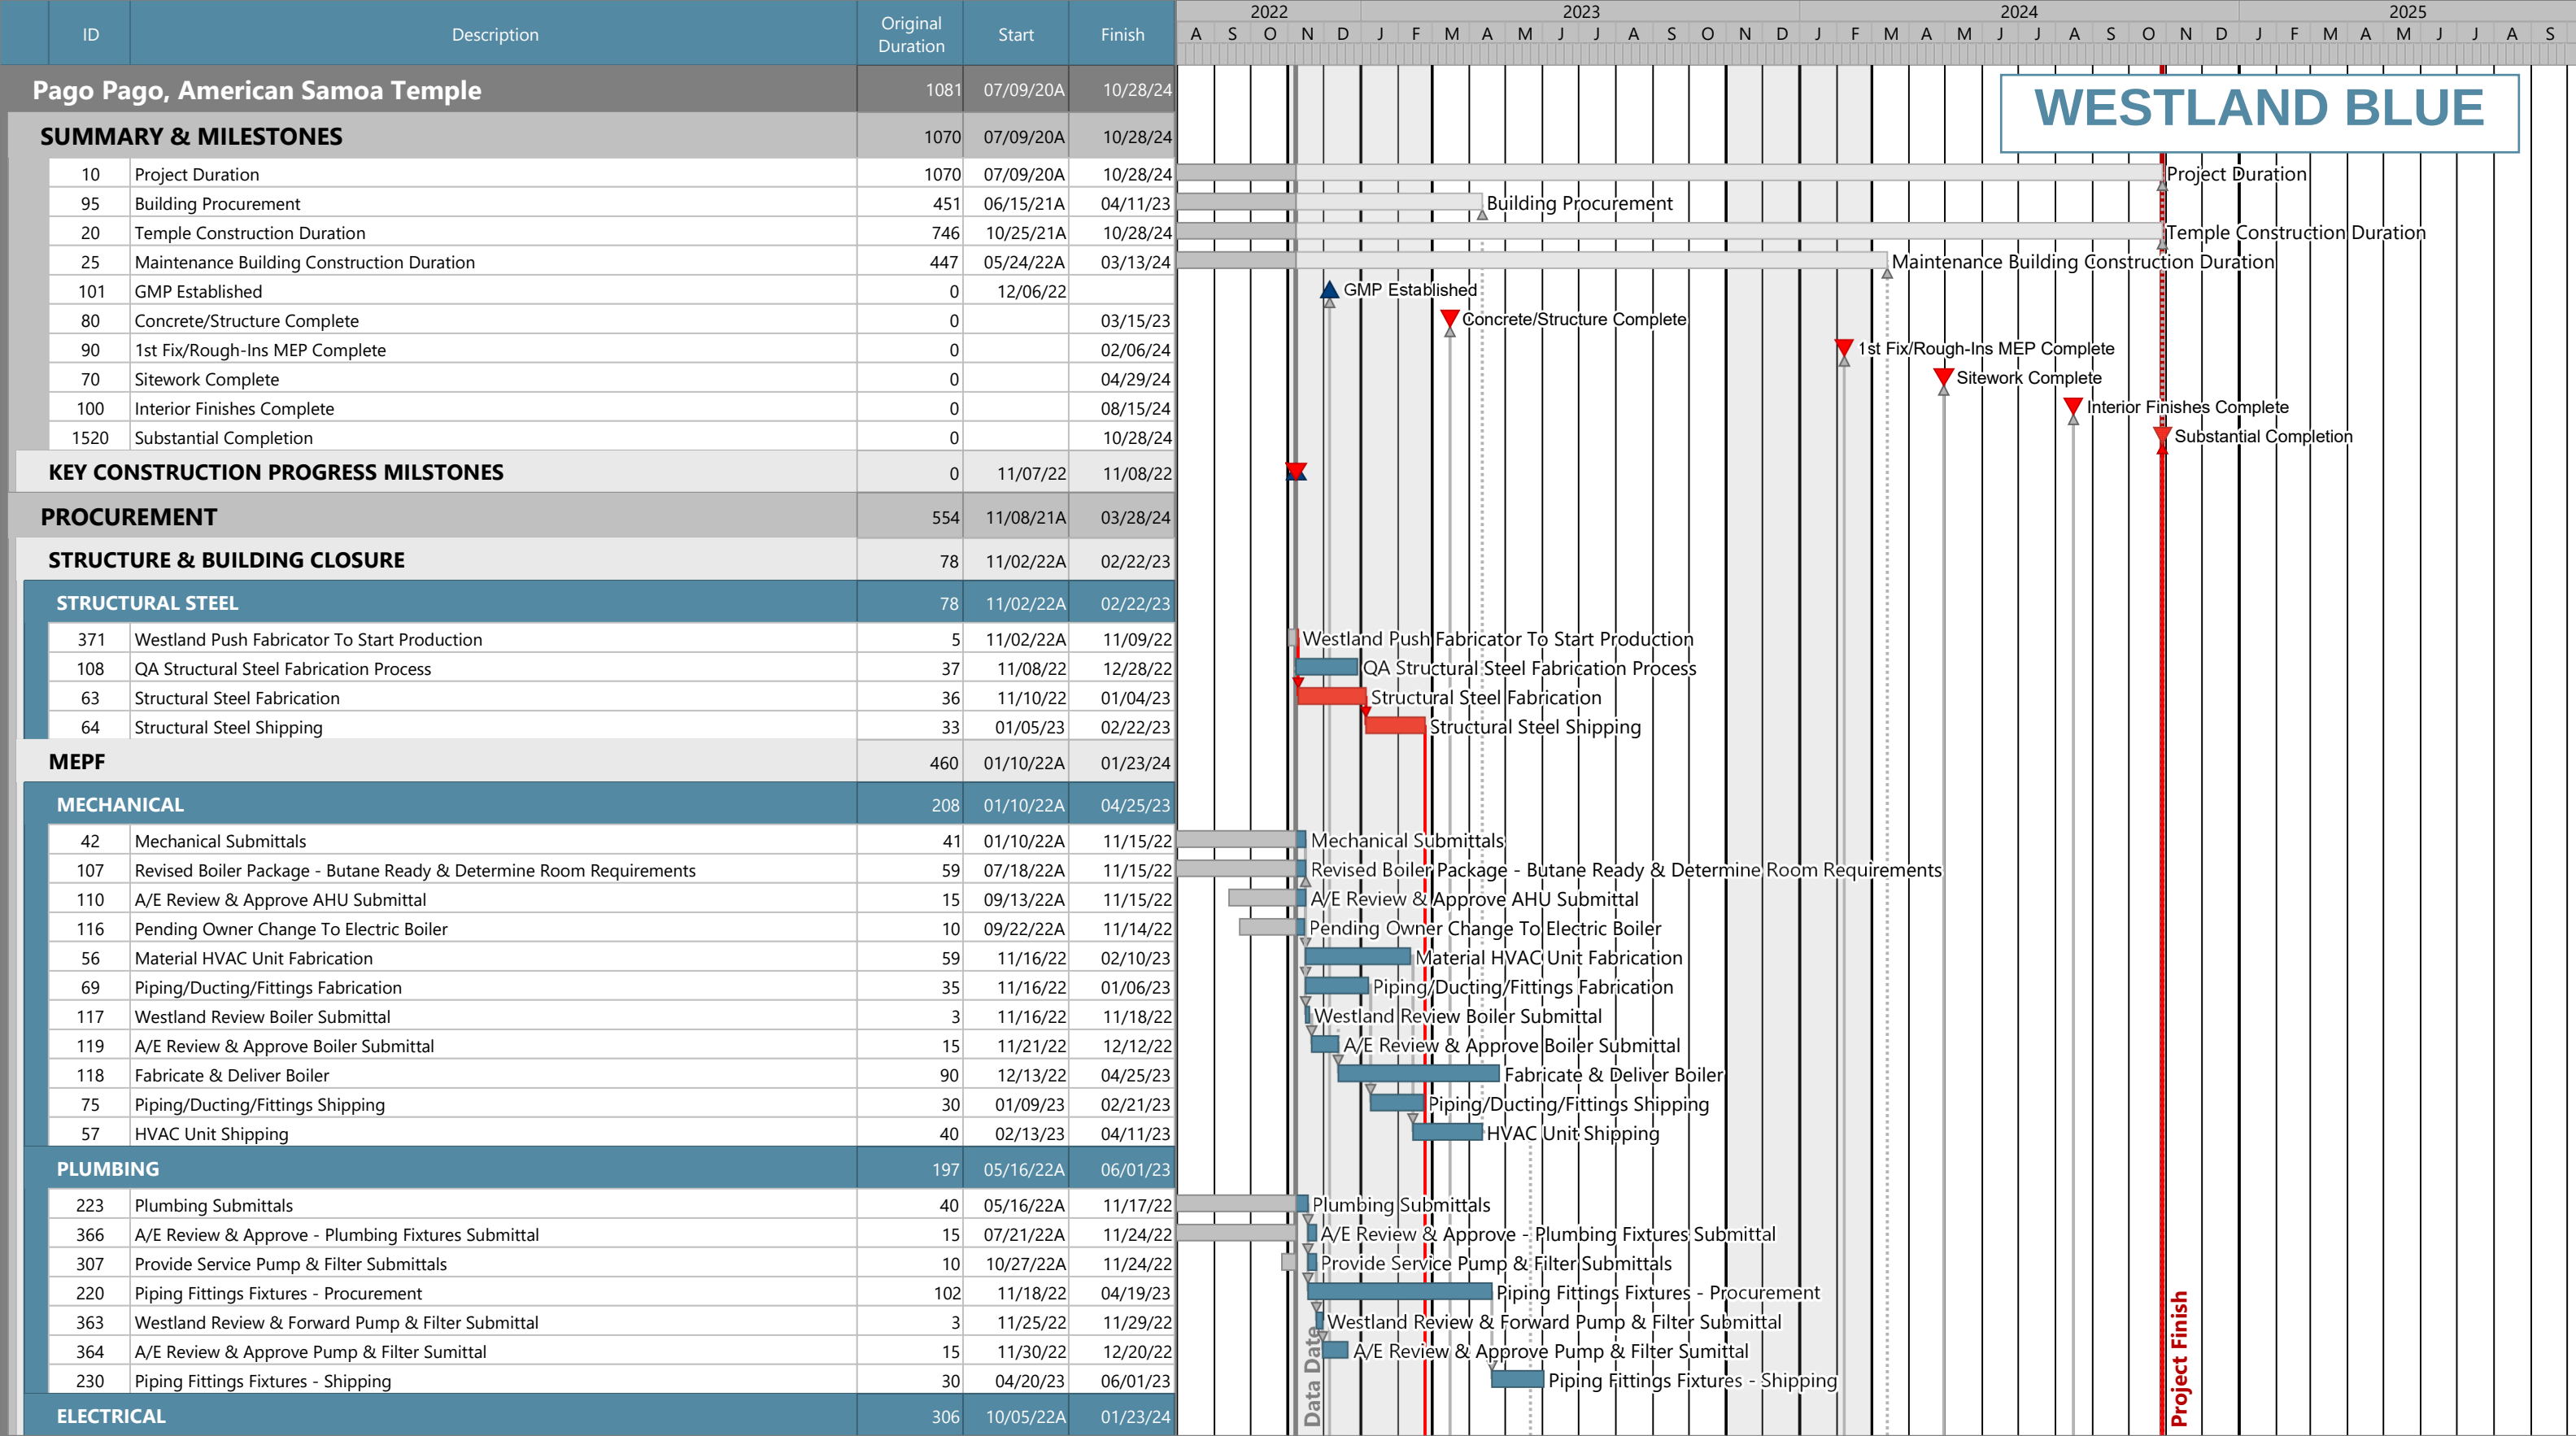

Start Date: 06/01/20
Finish Date: 10/28/24
Data Date: 11/08/22
Run Date: 11/11/22

PAGO PAGO - AMERICAN SAMOA TEMPLE
PROJECT SCHEDULE



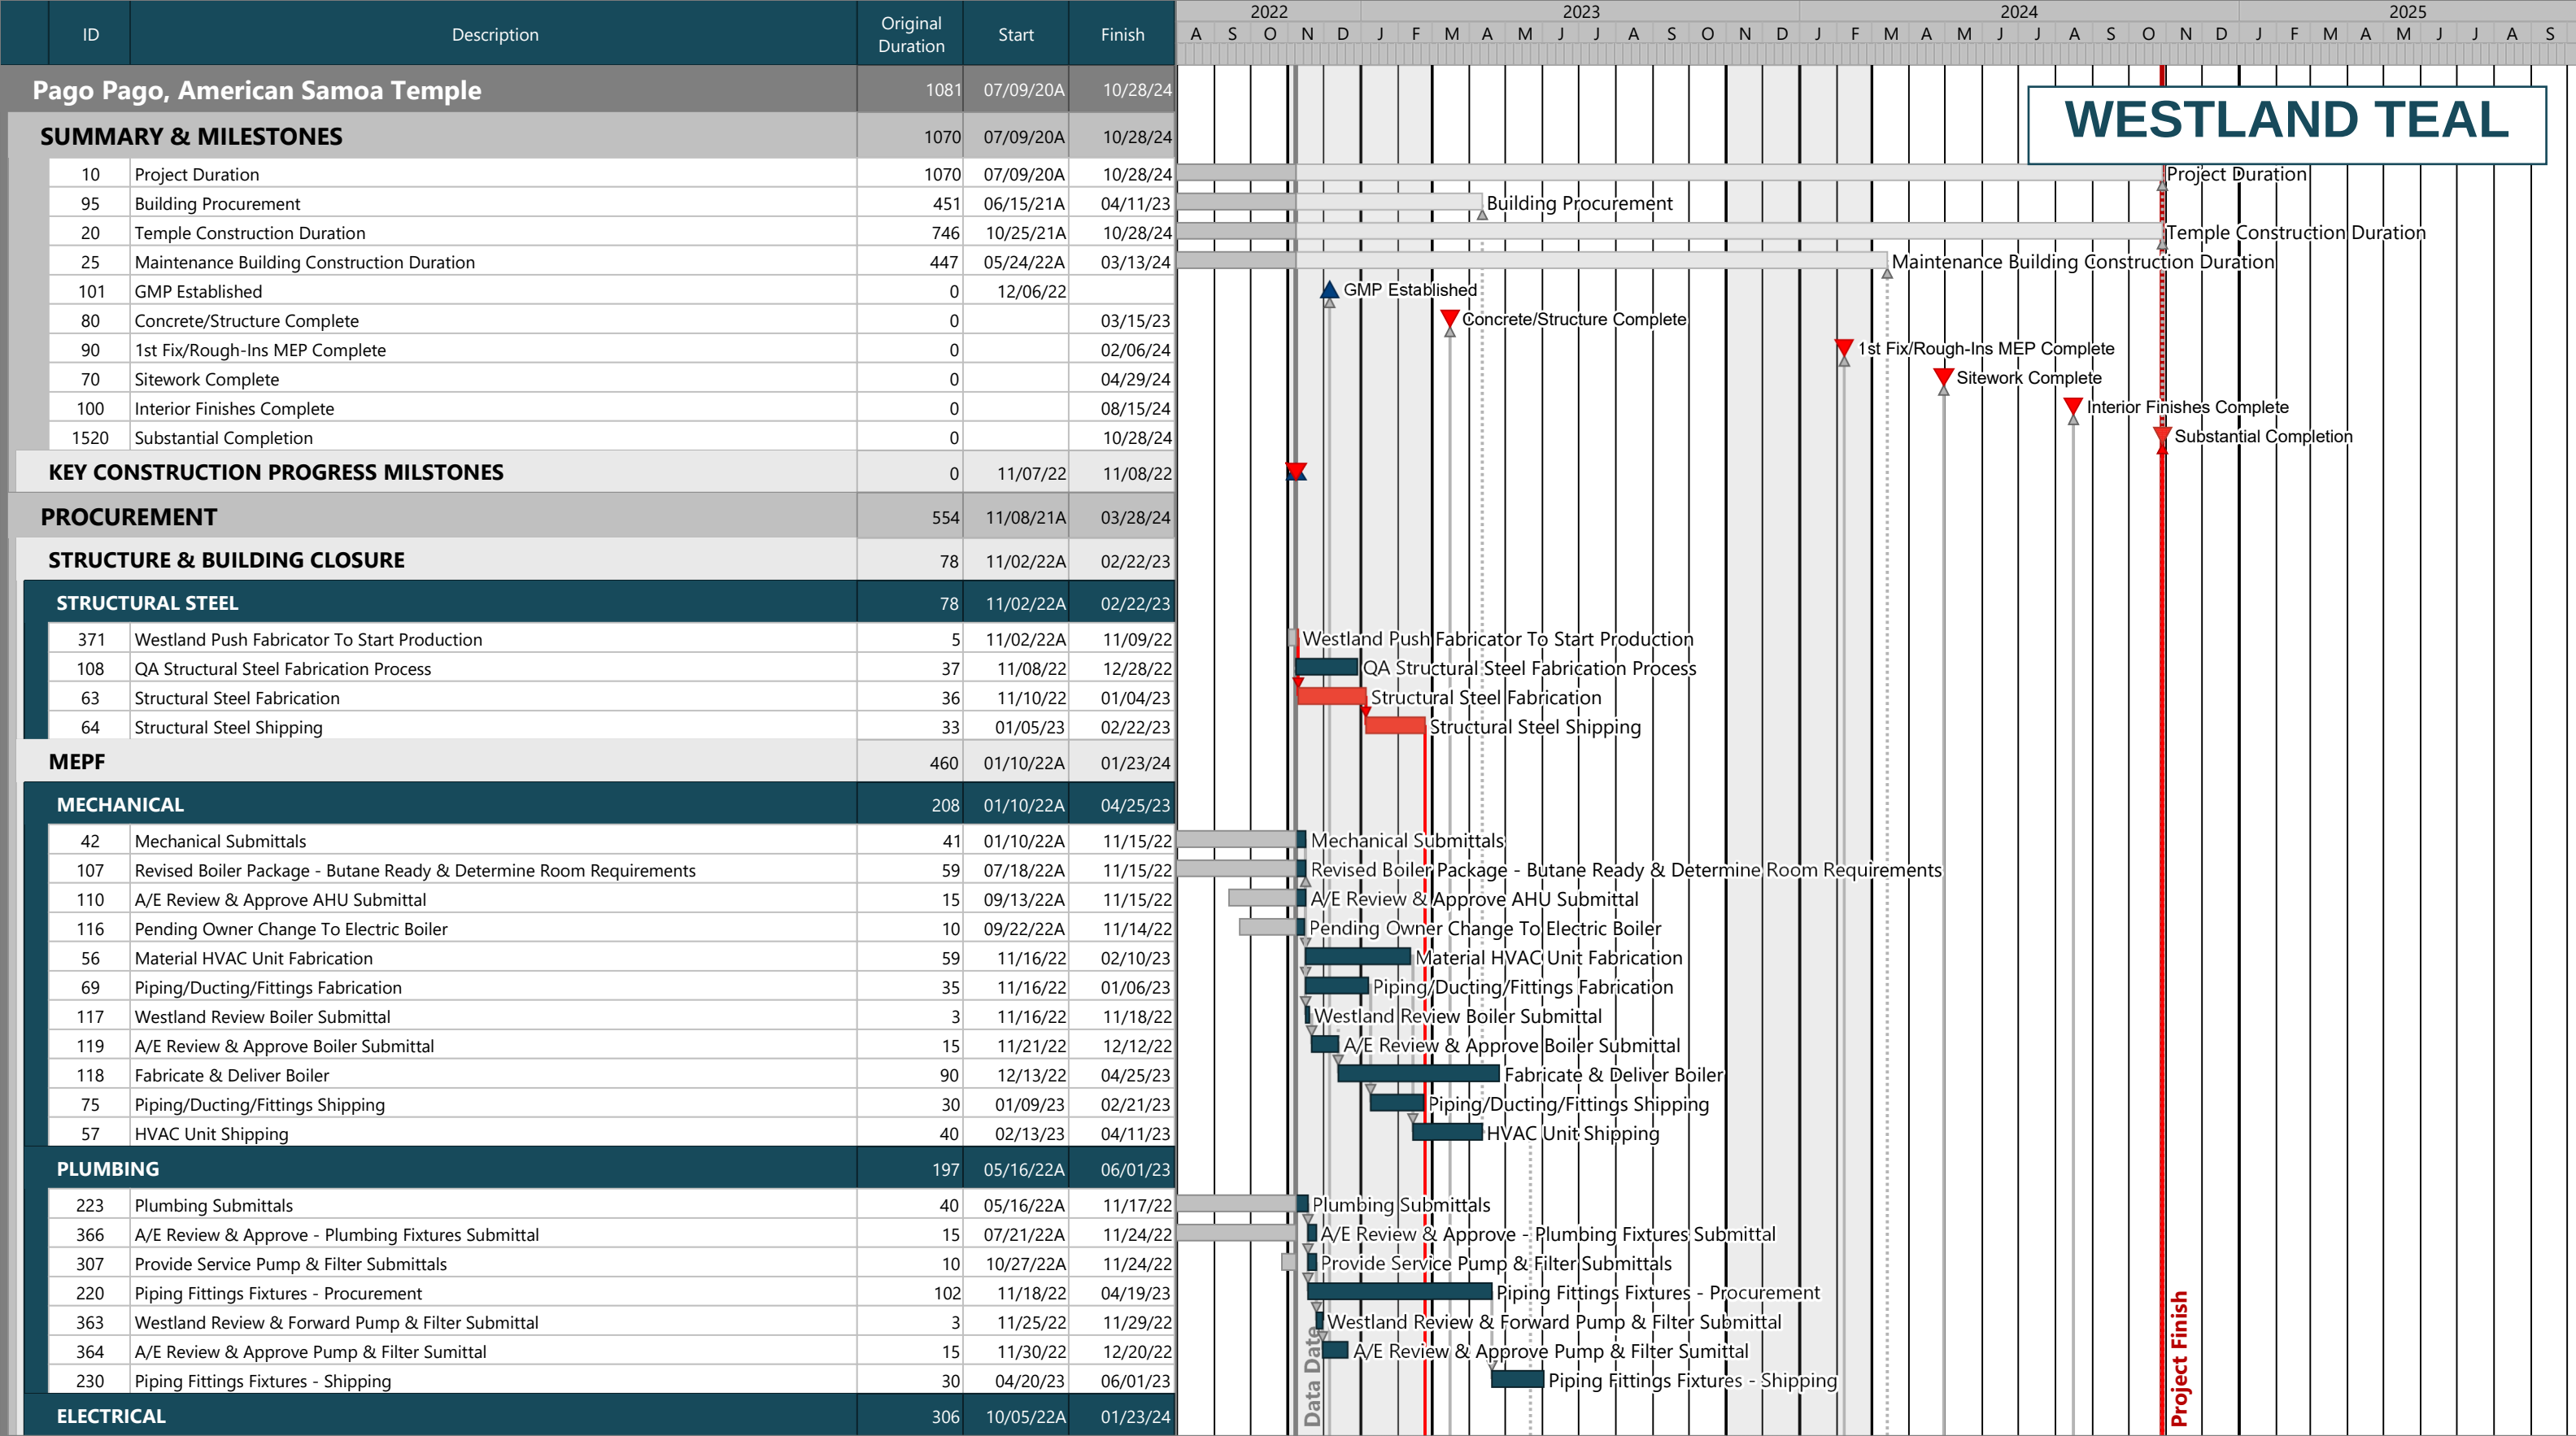

Start Date: 06/01/20
Finish Date: 10/28/24
Data Date: 11/08/22
Run Date: 11/11/22

PAGO PAGO - AMERICAN SAMOA TEMPLE
PROJECT SCHEDULE

